




Cal. 6106B


Characteristics


Casing diameter: 27.00 φ mm
 Maximum height: 5.15 mm
 Vibrations per hour: 21,600
 Automatic winding with sweep second
 Calendar (day & date)
 Pushing instant date setting
 Second-setting device
 "Diashock" Shock Resistant Device



112619



171619



231614



345612



193521



500620



823619


808618


810619


☆491400


☆493521



022458 3/1

Calibre No.	6106B	Jewels	17j	Style Name
⇨ Basic Calibre 6106A 25J Catalog No. 61-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112619	Barrel & train-wheel bridge	839610	Holder for transmission wheel & pawl lever	
122611	Center wheel bridge	632610	Date corrector finger	
161805	Pallet cock	☆801610	Date dial	
171619	Balance cock	802610	Date driving wheel	
193521	Framework for automatic device with ball-bearing	808618	Date dial guard	
205613	Complete barrel with arbor	810619	Date jumper	
213612	Barrel arbor	817610	Intermediate date wheel	
224611	Center wheel & pinion with cannon pinion	868610	Day finger	
225611	Cannon pinion	☆870610	Day star with dial disk (English letters)	
231614	Third wheel & pinion	880610	Date corrector	
241611	Sweep second wheel & pinion	883610	Date corrector spring	
251611	Escape wheel & pinion	☆884611	Holding ring for dial	
261611	Minute wheel	963610	Snap for day star with dial disk	
271611	Hour wheel	022150	Stud screw	
281611	Setting wheel	022252	Holder screw for transmission wheel & pawl lever	
282611	Clutch wheel	022257	Date corrector spring screw	
285611	Ratchet wheel	022266	Minute wheel bridge screw	
301611	Jewelled pallet fork & staff	022351	Center wheel bridge screw	
310611	Balance complete with stud	022458	Screw for oscillating weight	
315611	Balance staff	022467	Ratchet wheel screw	
331610	Roller with jewel	022468	Pallet cock screw	
341611	Regulator	022469	Bridge screw	
345612	Stud holder	022470	Framework screw for automatic device with ball-bearing	
354615	Winding stem	022471	Click screw	
381611	Click	022662	Setting lever spring screw	
383611	Setting lever with axle	022677	Screw for day & date driving wheel	
384611	Yoke (Clutch lever)	022758	Dial screw	
387611	Minute wheel bridge	022760	Date dial guard screw	
388611	Setting lever spring	011145	Upper hole jewel for center wheel	
391610	Second-setting lever	011146	Lower hole jewel for center wheel	
☆397610	Lever for unlocking stem	011306	Lower hole jewel for 3rd wheel	
401615	Mainspring with slipping attachment	011406	Upper hole jewel for escape wheel	
☆491400	Dial washer	011406	Lower hole jewel for escape wheel	
☆493521	Hour wheel ring	011503	Upper hole jewel for pallet	
014363	Diashock upper frame	011503	Lower hole jewel for pallet	
014364	Diashock lower frame	011147	Upper hole jewel for transmission wheel	
014365	Diashock hole jewel with frame	011147	Lower hole jewel for transmission wheel	
011210	Diashock cap jewel	023150	Tube for pallet cock screw (Cylinder type)	
014317	Diashock spring	023151	Tube for bridge screw	
500620	Oscillating weight	023170	Tube for pallet cock screw (Recessed type)	
505611	Transmission wheel	023171	Tube for framework screw of automatic device	
823619	Eccentric post			
831611	Pawl lever with jewel			

Remarks :

Lever for unlocking stem
 ☆ 397610 Used only for the one-piece waterproof case.

Dial washer (☆ 491400)
Hour wheel ring (☆ 493521) } These parts are available only for watches without day & date calendar mechanism.

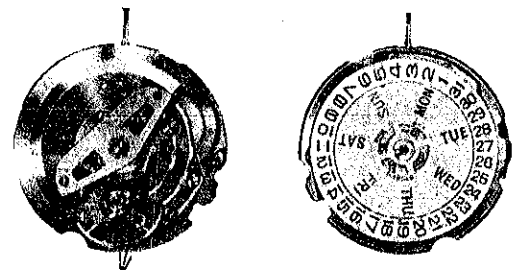
Date dial
 ☆ 801610 (Black figures on white background) Used when the crown is located at 4 o'clock and the date frame at 3 o'clock.
 If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Day star with dial disk
 ☆ 870610 (English letters) Used when the crown is located at 4 o'clock and the day frame at 3 o'clock.
 If the day star with dial disk is required in any other type, specify the number printed on the disk.

Holding ring for dial Measure the total thickness and the outside diameter
 ☆ 884611 1.82 mm total thickness and 29.1 φ mm outside diameter
 If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆ ⇨ Please see remarks on the reverse page.
 As for all other parts not shown here, please refer to the basic calibre (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).


☆ ⇨ Please see remarks.
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).





Cal. 6106B


Characteristics


Casing diameter : 27.00 φ mm
 Maximum height : 5.15 mm
 Vibrations per hour : 21,600
 Automatic winding with sweep second
 Calendar (day & date)
 Pushing instant date setting
 Second-setting device
 "Diashock" Shock Resistant Device
 "Diafix" Oil Lubrication Device



112522



231617



251613



261615



301612



345612



015421



015411



011206



015113



015450



193525



500620



823619



808618



810619



☆357612


☆998613


☆999611


022458


022761


2/1

Calibre No.	Jewels	Style Name	
6106B	25j		
⇨ Basic Calibre 6106A 25J Catalog No. 61-06-1			
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
112522	Barrel & train-wheel bridge	015113	Diafix spring
122611	Center wheel bridge	015450	Diafix lower hole & cap jewel with frame for pallet
161805	Pallet cock	500620	Oscillating weight
171611	Balance cock	505611	Transmission wheel
193525	Framework for automatic device with ball-bearing	823619	Eccentric post
205613	Complete barrel with arbor	831611	Pawl lever with jewel
213612	Barrel arbor	839610	Holder for transmission wheel & pawl lever
224611	Center wheel & pinion with cannon pinion	632610	Date corrector finger
225611	Cannon pinion	☆801610	Date dial
231617	Third wheel & pinion	☆801612	Date dial
241611	Sweep second wheel & pinion	802610	Date driving wheel
251613	Escape wheel & pinion	808618	Date dial guard
261615	Minute wheel	810619	Date jumper
271611	Hour wheel	817610	Intermediate date wheel
281611	Setting wheel	868610	Day finger
282611	Clutch wheel	☆870610	Day star with dial disk
285611	Ratchet wheel	880610	Date corrector
301612	Jewelled pallet fork & staff	883610	Date corrector spring
310611	Balance complete with stud	☆884611	Holding ring for dial
315611	Balance staff	963610	Snap for day star with dial disk
331610	Roller with jewel	022150	Stud screw
341611	Regulator	022252	Holder screw for transmission wheel & pawl lever
345612	Stud holder	022257	Date corrector spring screw
354615	Winding stem	022266	Minute wheel bridge screw
☆357612	Click	022351	Center wheel bridge screw
381611	Setting lever with axle	022458	Screw for oscillating weight
383611	Yoke (Clutch lever)	022467	Ratchet wheel screw
384611	Minute wheel bridge	022468	Pallet cock screw
387611	Setting lever spring	022469	Bridge screw
388611	Second-setting lever	022470	Framework screw for automatic device with ball-bearing
391610	Lever for unlocking stem	022471	Click screw
☆397610	Mainspring with slipping attachment	022662	Setting lever spring screw
401615	Indicator wheel	022677	Screw for day & date driving wheel
☆998613	Indicator wheel spring	022760	Date dial guard screw
☆999611	Diashock upper frame	022761	Dial screw
014363	Diashock lower frame	011145	Upper hole jewel for center wheel
014364	Diashock hole jewel with frame	011146	Lower hole jewel for center wheel
014365	Diashock cap jewel	011306	Upper hole jewel for sweep second wheel
011210	Diashock spring	011503	Upper hole jewel for pallet
014317	Diafix upper hole jewel with frame for 3rd wheel	011147	Upper hole jewel for transmission wheel
015421	Diafix lower hole jewel with frame for 3rd wheel	011147	Lower hole jewel for transmission wheel
015421	Diafix upper hole jewel with frame for escape wheel	011701	Hole jewel for minute wheel
015411	Diafix lower hole jewel with frame for escape wheel	023150	Tube for pallet cock screw (Cylinder type)
015411	Diafix upper hole jewel with frame for escape wheel	023151	Tube for bridge screw
015411	Diafix lower hole jewel with frame for escape wheel	023170	Tube for pallet cock screw (Recessed type)
011206	Diafix cap jewel	023171	Tube for framework screw of automatic device

Remarks :

- ☆ 357612 (Winding stem)
- ☆ 998613 (Indicator wheel)
- ☆ 999611 (Indicator wheel spring)
- ☆ 397610 (Lever for unlocking stem) Used only for the one-piece waterproof case.
- If the lever for unlocking stem is required in any other type, specify the dial No. or the case No.
- ☆ 801610 (Date dial — Black figures on white background)
- ☆ 801612 (Date dial — Black figures on gilt background)
- If the date dial is required in any other type, specify ① the Cal. No. ② the crown position ③ the date frame position and ④ the dial No.
- ☆ 870610 (Day star with dial disk) Used when the crown is located at 4 o'clock and the day frame at 3 o'clock.
- If the day star with dial disk is required in any other type, specify the number printed on the disk.
- ☆ 884611 (Holding ring for dial) 1.8 mm total thickness and 29.1 φ mm outside diameter
- If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆ ⇨ Please see remarks on the reverse page.
 As for all other parts not shown here, please refer to the basic calibre (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).

☆ ⇨ Please see remarks.
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).