


TECHNICAL GUIDE

SEIKO
QUARTZ

CAL. 7549A, 7548A

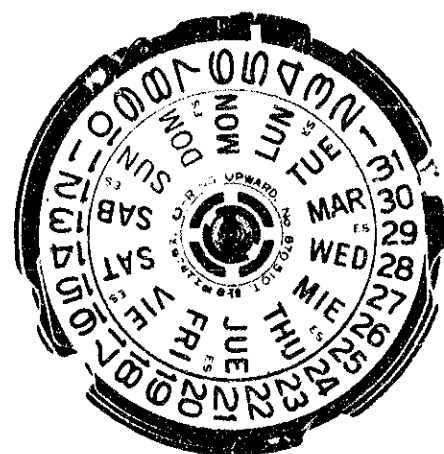

CONTENTS

I. SPECIFICATIONS	1
II. BATTERY CHANGE AND PERIODIC CHECK SYSTEM	2
III. DISASSEMBLING, REASSEMBLING AND LUBRICATING OF THE CASE	2
1. Cal. 7549, 600m diver's watch	3
2. Cal. 7549, 300m diver's watch	7
3. Cal. 7548, 150m diver's watch	11
IV. DISASSEMBLING, REASSEMBLING AND LUBRICATING OF THE MOVEMENT	15
1. How to disassemble, reassemble and lubricate the movement	15
2. Disassembling, reassembling and lubricating of the battery portion	15
3. Disassembling, reassembling and lubricating of the calendar mechanism ..	16
4. Disassembling, reassembling and lubricating of the circuit block, coil block and gear train	18
5. Disassembling, reassembling and lubricating of the setting mechanism	20
V. CHECKING AND ADJUSTMENT	21
1. Guide table for checking and adjustment	21
2. Procedures for checking and adjustment	22
VI. PERIODIC CHECK PROCEDURES	32

I. Specifications			
Item	Calibre No.	7549A	7548A
	Water resistance	600m, 300m	150m
Time indication	3-hand time indication (hour, minute & second)		
Additional mechanism	Calendar display (day & date) Bilingual changeover system for the day of the week Instant day & date setting device Electronic circuit reset switch Second setting device (Stops at every second) Battery life indicator		
Crystal oscillator	32,768Hz (Hz = Herz cycle per second)		
Loss/gain	Loss/gain at normal temperature: Monthly rate: less than 15 seconds (Annual rate: less than 3 minutes)		
Casing diameter	φ27.0mm		
Height	4.6mm without battery		
Operational temperature range	-10°C ~ +60°C (14°F ~ 140°F)		
Driving system	Step motor system (2 poles)		
Regulation system	Trimmer condenser		
Battery power	Silver oxide battery (U.C.C. 301) Battery life is approximately 3 years. Voltage: 1.5V		
Jewels	5 jewels		

-

Trouble with a diver's watch may endanger the life of the diver. Therefore, to show when the battery must be replaced, series 75 diver's watches are inscribed on the case back as shown in the right illustration with the expected time (month and year) for the first battery replacement and in addition the time when the periodic check (refer to page 32) is necessary for safety assurance. Replace the battery of the diver's watch, which is received within the period marked with " ● " on the case back showing the expected time for battery replacement, with a new one and further have it subjected to the periodic check.

[Example]
When the battery change and the periodic check are performed during April to June, 1981 as shown in the right illustration, inscribe "●" mark on the position corresponding to April to June, 1984 to return the watch to the user.
For details refer to page 32.



-
- Check scratch
- Check loosened screw
- Check loosened crown

1. Cal. 7549, 600m diver's watch


The remarks for disassembling and reassembling of the parts numbered within the double circles are given in the next and following pages.

• Lubricating marks

Types of oil	Oil quantity
● Silicone grease (500,000 c.s.)	○ Liberal quantity
○ SEIKO Watch Oil, S-6	○ Normal quantity
	○ Extremely small quantity

<Disassembling procedures>

<Reassembling procedures>

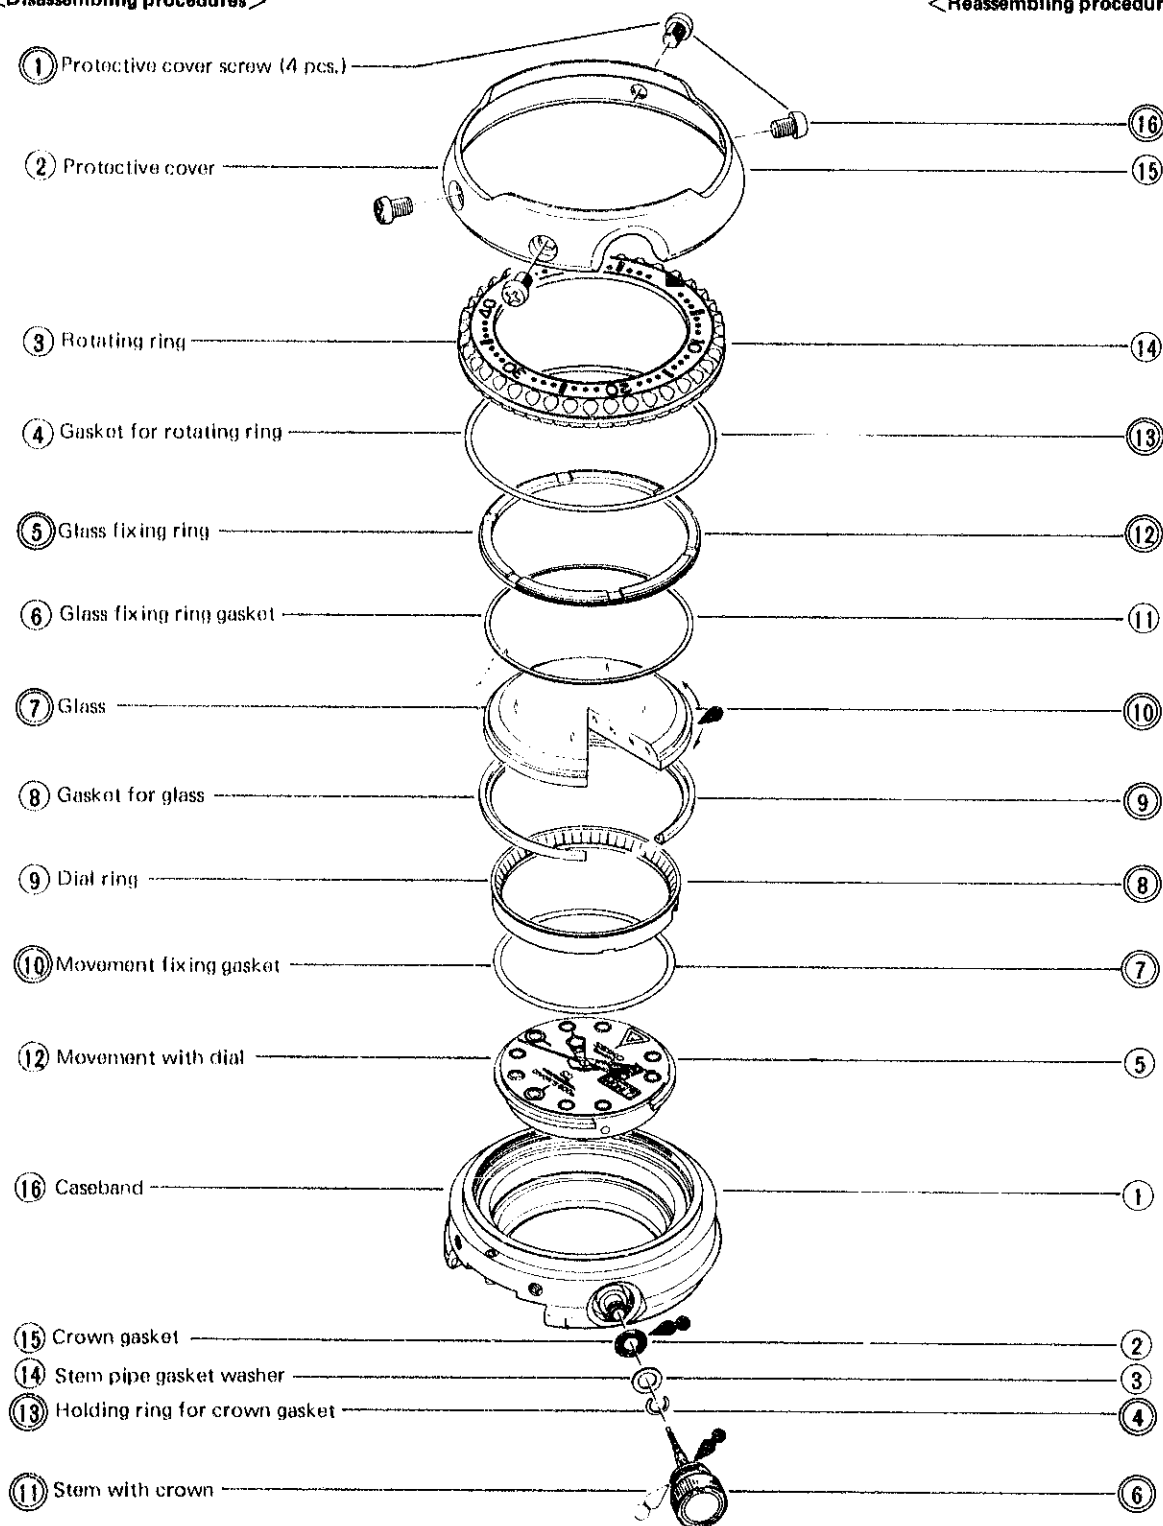

1-1 Remarks for Disassembling

More screws are used for this type of cases in comparison with other ones. In handling the threaded portion, be sure to check if there is any scratch and defect.

① Protective cover screw (4 pcs.)

Remove the protective cover screws with the Phillips head screwdriver.

⑤ Glass fixing ring

Remove the glass fixing ring with the casing instrument S-20. (Photo 1)

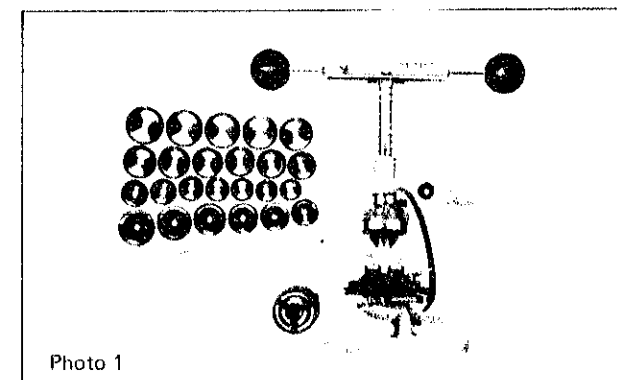


Photo 1

⑦ Glass

Remove the glass with the suction pad. Absolutely never scratch or stain the back surface of the glass as it is specially coated. If there is any stain, wipe it off with a soft, clean cloth.

Clean dust and lint off with a soft brush. (Photo 2)


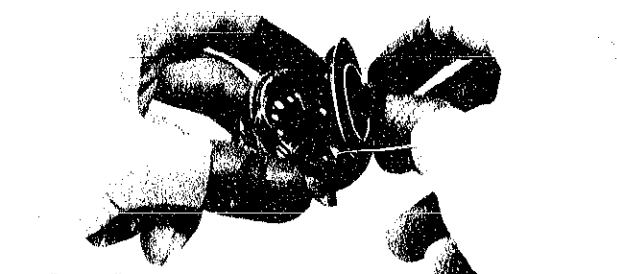


Photo 2

⑩ Movement fixing gasket

Remove the movement fixing gasket by using the probe from the position of the protrusion of the dial at the 2 o'clock position. (Photo 3)

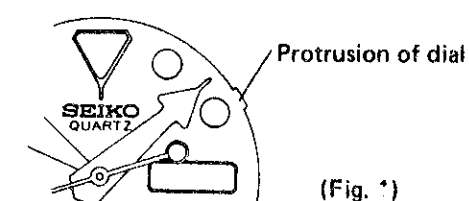

(Fig. 1)

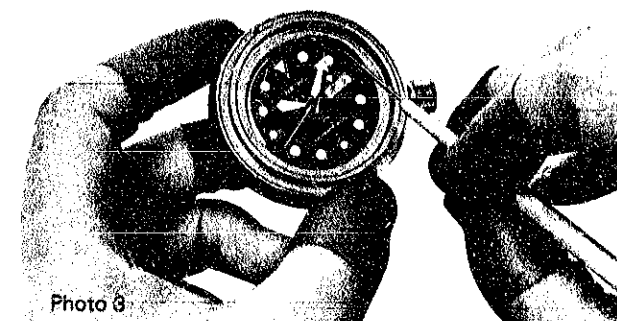


Photo 3


⑪ Stem with crown

Remove the stem with crown by pushing the lever for unlocking stem.

Although the stem is of joint construction handle it usually one block.

⑬ Holding ring for crown gasket

Remove the holding ring for crown gasket as shown in Photo 4.

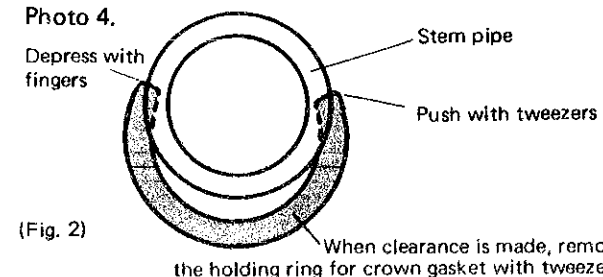

(Fig. 2)

When clearance is made, remove the holding ring for crown gasket with tweezers.

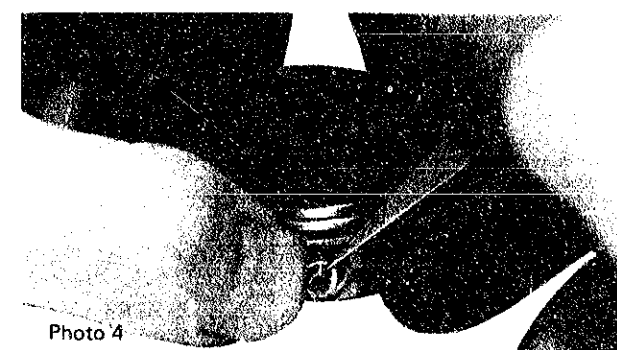


Photo 4

1-2 Remarks for Reassembling

Dry the parts completely before reassembling, and re-assemble the watch in a room with low humidity.

④ Holding ring for crown gasket

After reassembling correct the spread of the holding ring for crown gasket by tightening it with the tweezers at their middle. (Photo 5)


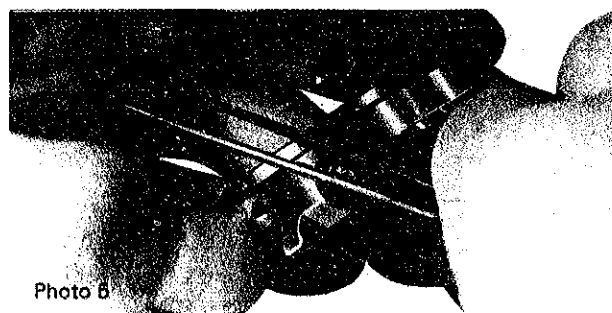


Photo 5

⑥ Stem with crown

- Lubricate each portion in Fig. 3 so as to get the entire circumference evenly lubricated.
- When the joint stem is disassembled, reassemble it as shown in Photo 6.

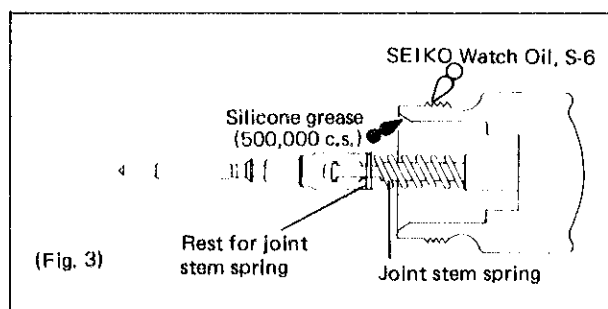

(Fig. 3)

⑦ Movement fixing gasket

- Set the movement fixing gasket securely so that it is inserted under the protrusion of the dial (2 o'clock position).
- Do not apply silicone grease (500,000 c.s.).


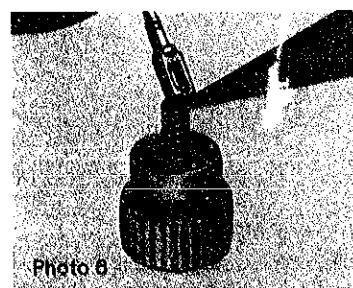


Photo 6

⑧ Dial ring


Fit the groove for the dial protrusion to the position of the dial protrusion to set the dial ring. (Fig. 4)

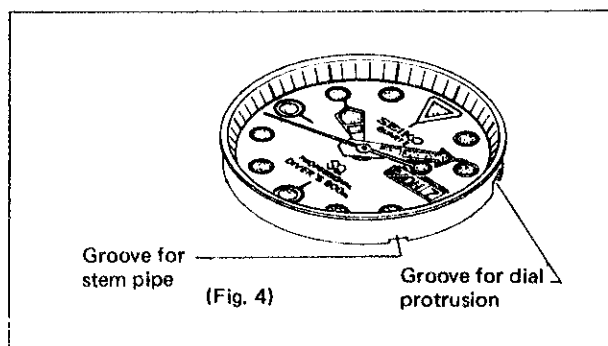

(Fig. 4)

⑨ Gasket for glass


- When replacing the gasket for glass, make sure that it will be placed in the position correctly. Check the place marked with ○ as shown in Fig. 5.
- Do not apply silicone grease (500,000 c.s.).

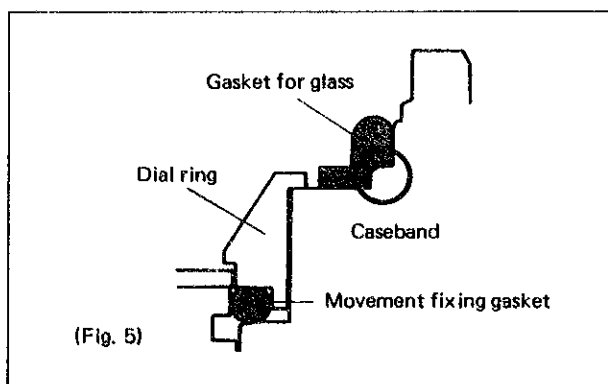

(Fig. 5)

⑩ Glass

- Apply silicone grease (500,000 c.s.) slightly to the entire circumference indicated by the oblique lines in Fig. 6 with the tweezers bound with chamois sheet moistened with silicone grease (500,000 c.s.) (Wipe off excessive silicone grease (500,000 c.s.) with the chamois sheet. Otherwise, it will run into the dial ring to stain.)
- Place the glass stably by pushing it horizontally right from the above. While pushing the glass, be sure that the gasket for glass is placed in the position correctly. (Photo 7)

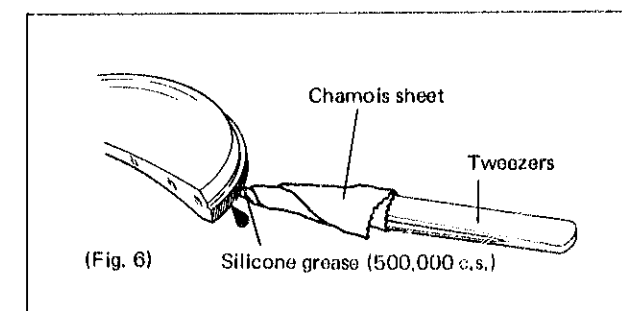

(Fig. 6)

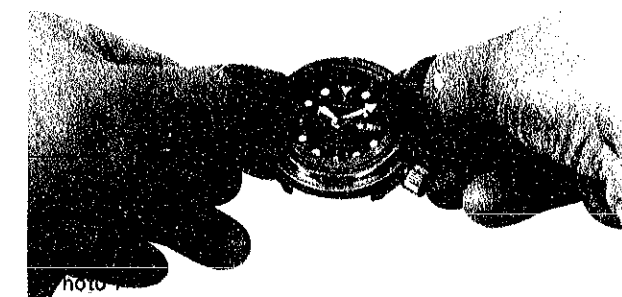


Photo 7

⑫ Glass fixing ring

First, tighten the glass fixing ring with fingers and re-tighten it with the casing instrument S-20. (If S-20 is used from the start, the threads are damaged.)


⑬ Gasket for rotating ring

Put fingers in the gasket and turn it to expand evenly, and place it inside the rotating ring firmly. (Photo 8)




⑭ Protective cover screw

- After lightly clamping the protective cover screws at four positions, tighten them diagonally so that the case cover cannot be inclined to one side. (Fig. 7) (The numbers in the illustration show an example of tightening procedures.)
- Check the rotation of the rotating ring after completion of reassembling. If the rotating ring does not rotate smoothly, apply silicone grease (500,000 c.s.) to the gasket for rotating ring or replace it with a new one and if it rotates too smoothly, replace the gasket for rotating ring with a new one. If the click does not sound proper, adjust it by turning two adjusting screws. (Fig. 8)

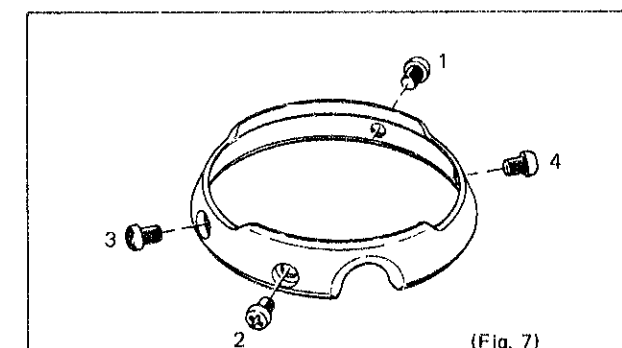

(Fig. 7)

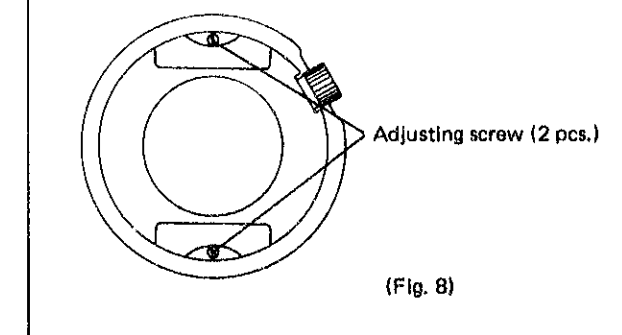


(Fig. 8)

2. Cal. 7549, 300m diver's watch

The remarks for disassembling and reassembling of the parts numbered within the double circles are given in the next and following pages.

<Disassembling procedures>

<Reassembling procedures>

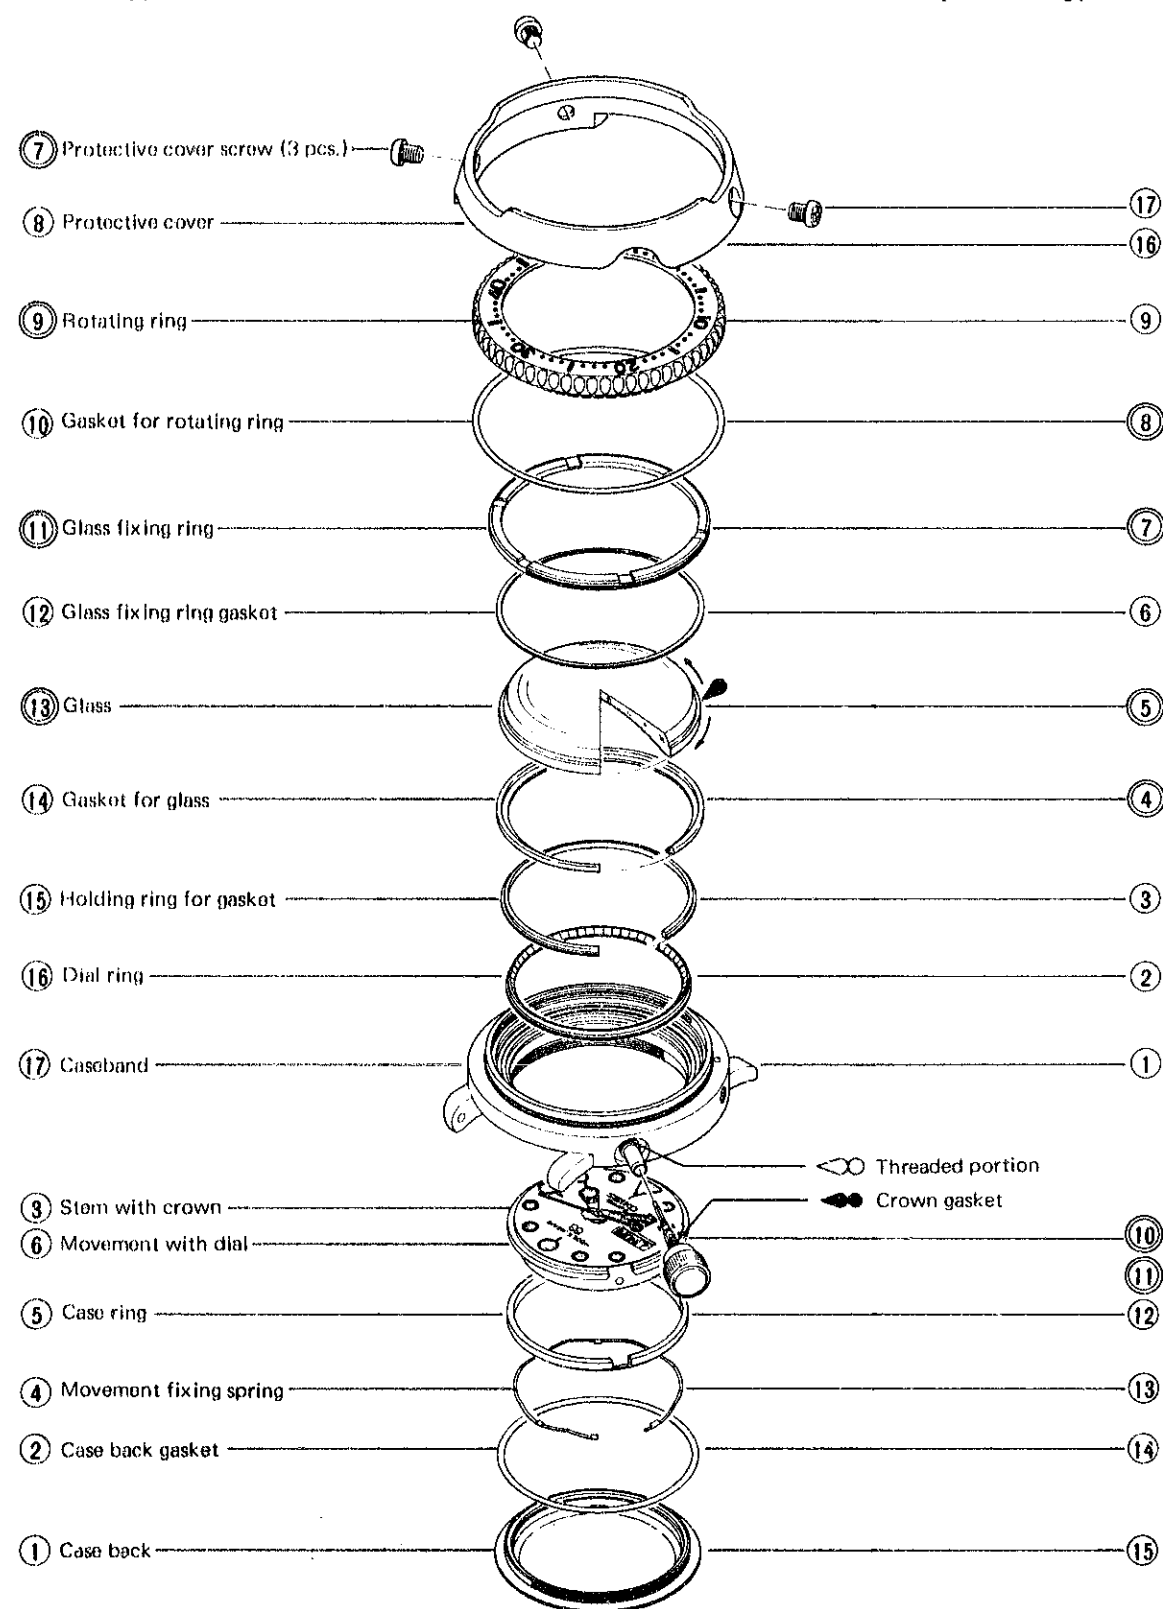

2-1 Remarks for Disassembling


More screws are used for this type of cases in comparison with other ones. In handling the threaded portion, be sure to check if there is any scratch and defect.

⑦ Protective cover screw (3 pcs.)

Remove the protective cover screws with the Phillips head screwdriver.


⑨ Rotating ring

Put the edge of the case opener into the opening notch of the rotating ring. (Fig. 1)

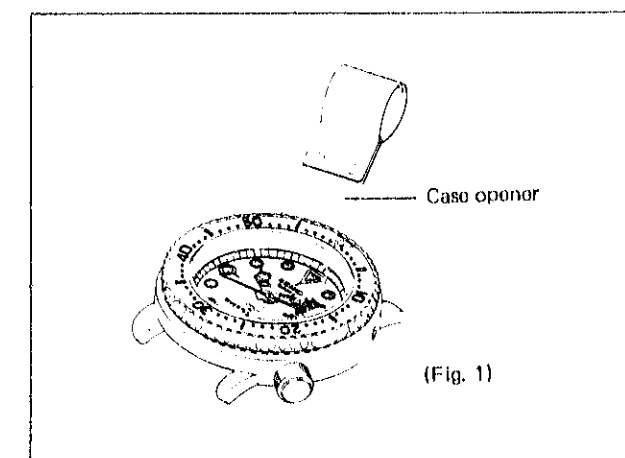

⑪ Glass fixing ring

Remove the glass fixing ring with the casing instrument S-20. (Photo 1)

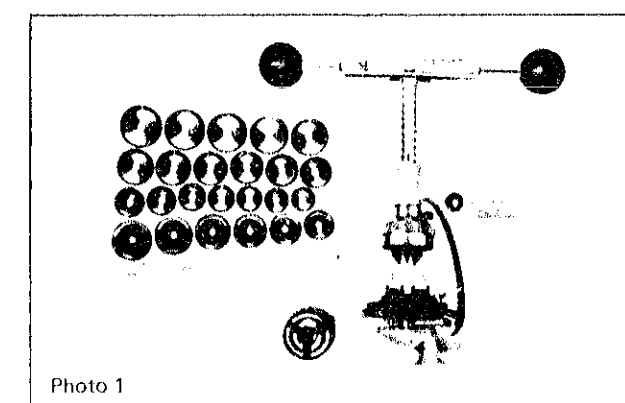


⑬ Glass

Remove the glass by pushing it from inside.

The back surface of the glass is specially coated and therefore remove the glass by pushing it with fingercot on a finger or by using chamois sheet so as not to scratch and stain the surface.

If there is any stain, wipe it off with a soft, clean cloth. Clean dust and lint off with a brush. (Photo 2)

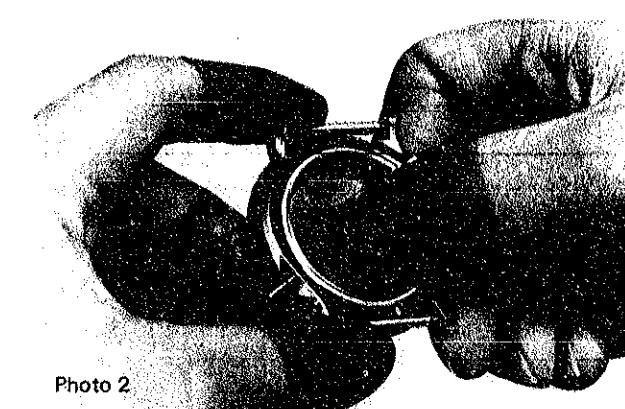


2-2 Remarks for Reassembling

Dry the parts completely before reassembling, and reassemble the watch in a room with low humidity.


④ Gasket for glass

- When replacing the gasket for glass, make sure that it will be placed in the position correctly. Check the place marked with ○ as shown in Fig. 2.
- Do not apply silicone grease (500,000 c.s.).

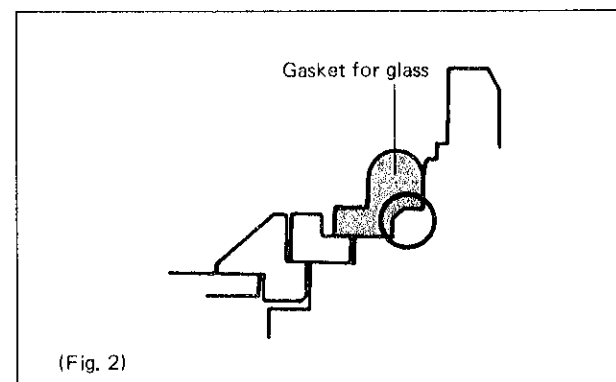


⑤ Glass

- Apply silicone grease (500,000 c.s.) slightly to the entire circumference indicated by the oblique lines in Fig. 3 with the tweezers bound with chamois sheet moistened with silicone grease (500,000 c.s.). (Wipe off excessive silicone grease (500,000 c.s.) with the chamois sheet. Otherwise, it will run into the dial ring to stain.)
- Place the glass stably by pushing it horizontally right from the above. While pushing the glass, be sure that the gasket for glass is placed in the position correctly. (Photo 3)

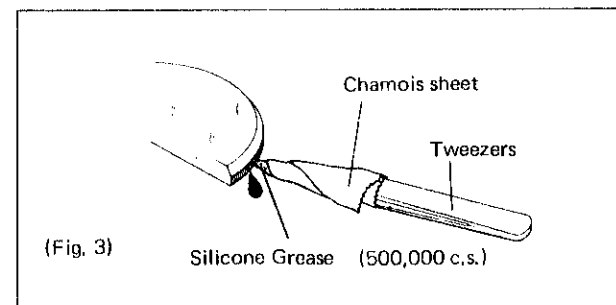

⑦ Glass fixing ring

First, tighten the glass fixing ring with fingers and re-tighten it with the casing instrument S-20. (If S-20 is used from the start, the threads are damaged.)

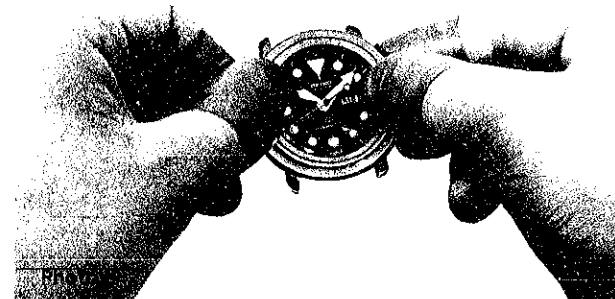


⑧ Gasket for rotating ring

Put fingers in the gasket and turn it to expand evenly, and place it inside the rotating ring firmly. (Photo 4)





⑩ Movement with dial

Fit the protrusion of the dial to the groove of the dial ring for reassembling. (Figs. 4, 5)

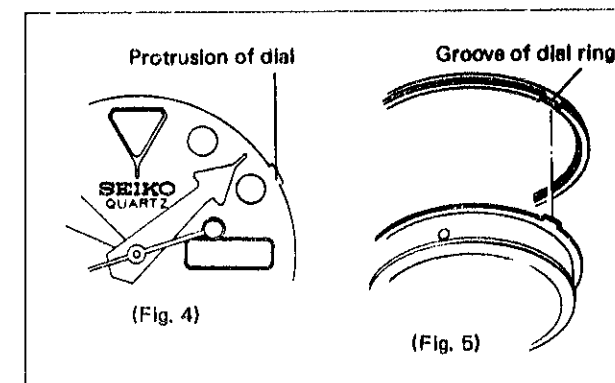

⑪ Stem with crown


- After lubricating each portion indicated in the illustration, assemble the stem with crown slowly so that the stem and the gasket may not be damaged. (Figs. 6, 7)
- Reassemble the disassembled joint stem as shown in Photo 5.

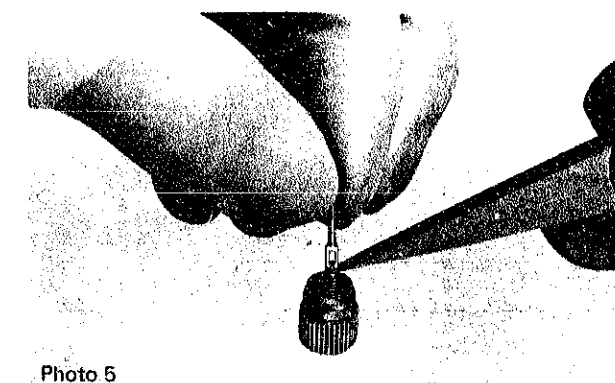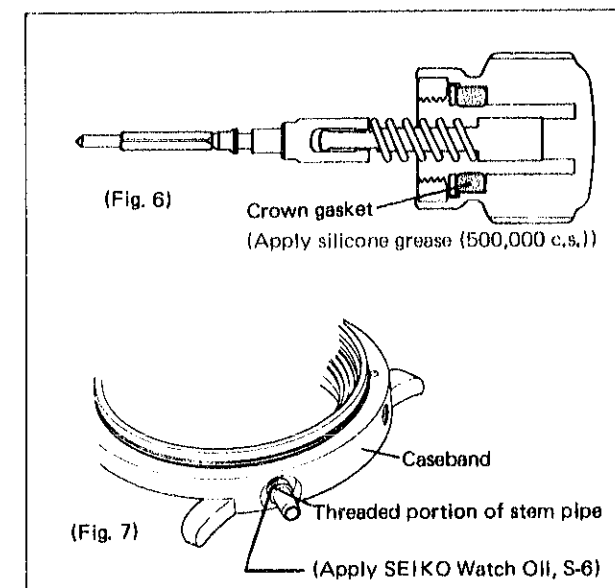

- After the reassembling is completed, check the rotation of the rotating ring. If the rotating ring does not rotate smoothly, apply silicone grease (500,000 c.s.) to the gasket for rotating ring or replace it with a new one and if it rotates too smoothly, replace the gasket for rotating ring with a new one.

3. Cal. 7548, 150m diver's watch


The remarks for disassembling and reassembling of the parts numbered within the double circles are given in the next and following pages.

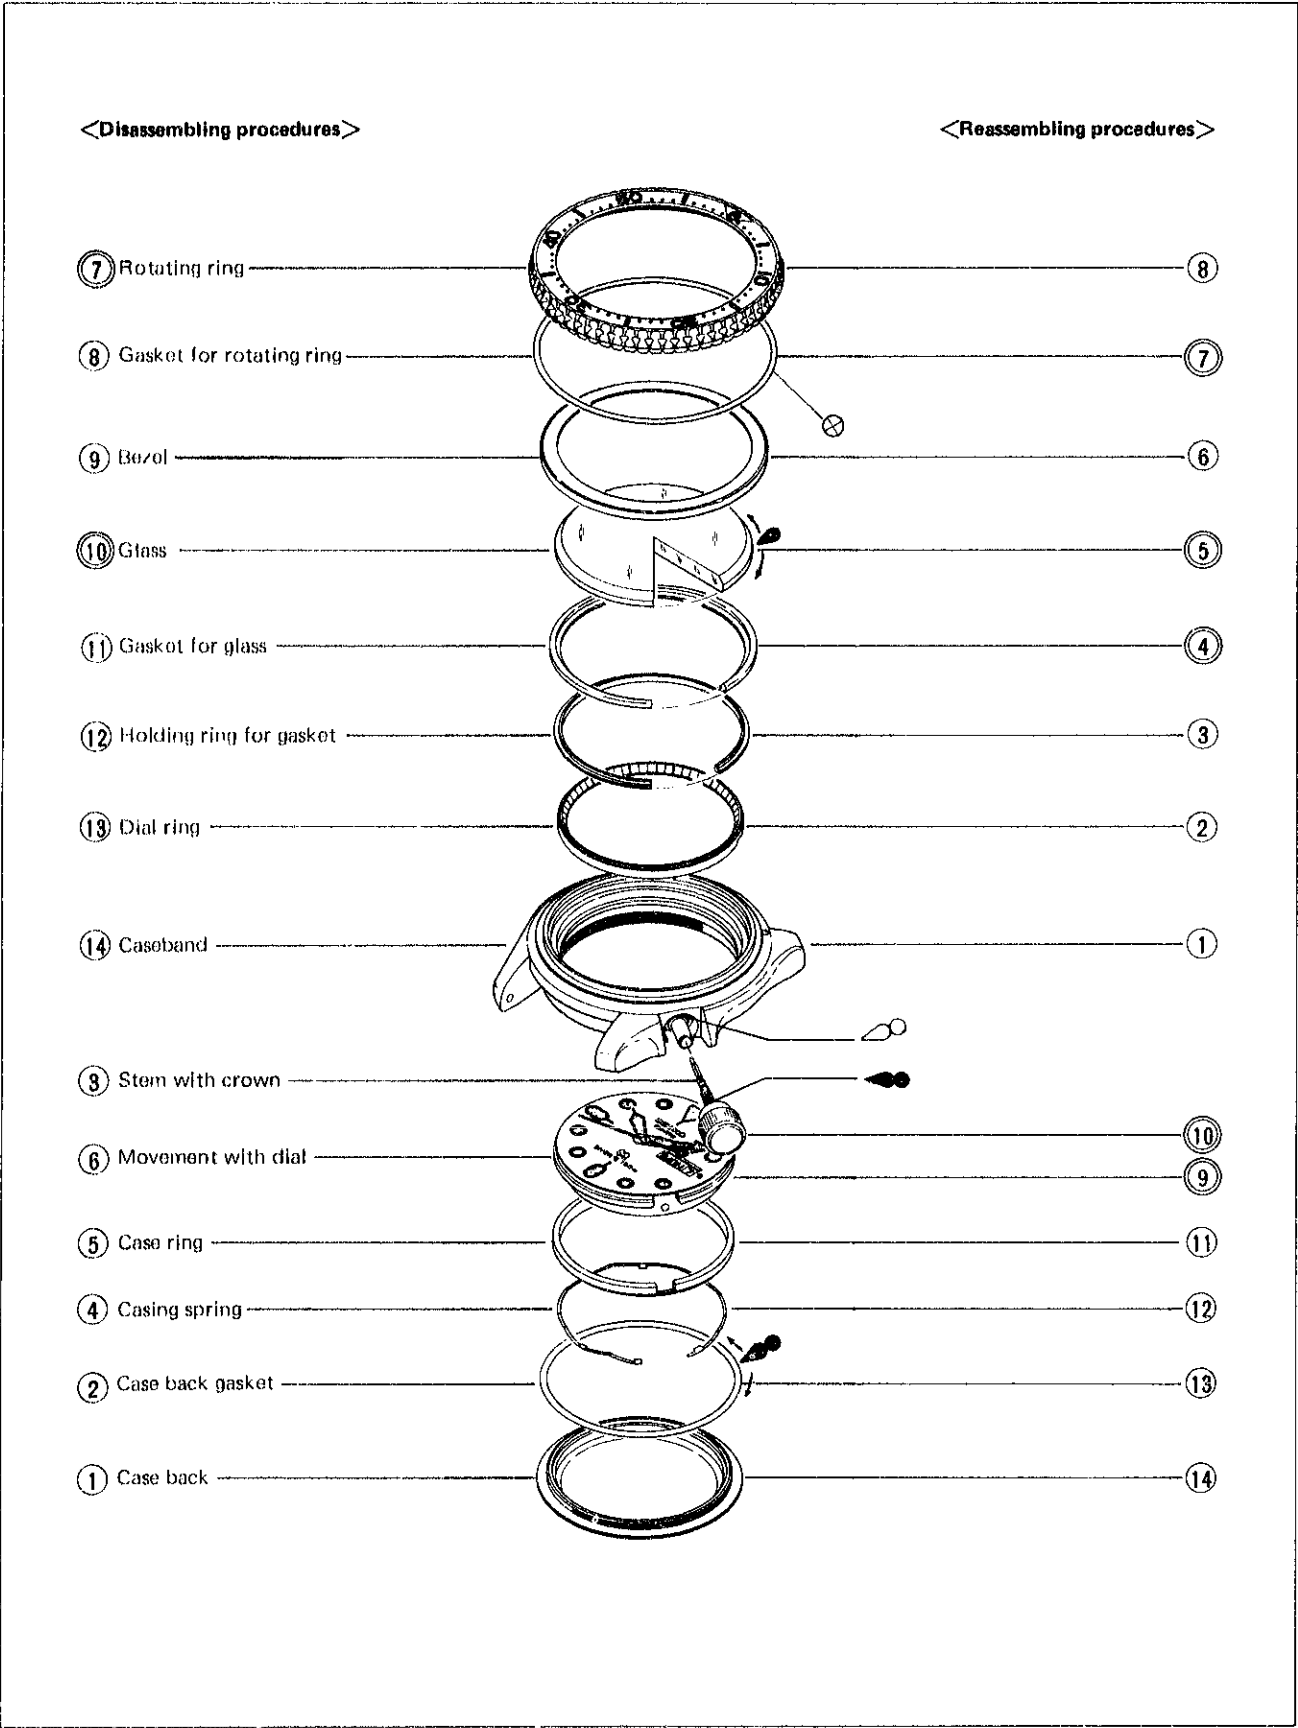

3-1 Remarks for Disassembling

⑦ Rotating ring

Put the case opener into the opening notch of the rotating ring to remove. (Fig. 1)

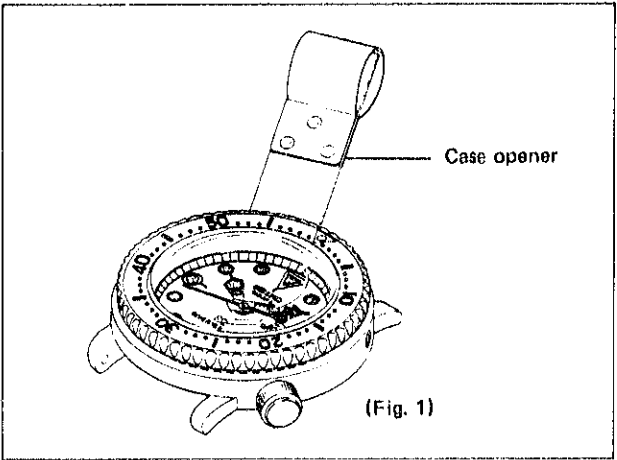


⑩ Glass

After removing the bezel from the opening notch by using the case opener, push the glass from inside to remove.

The back surface of the glass is specially coated and therefore remove the glass by pushing it with fingercot on a finger or by using chamois sheet so as not to scratch or stain the surface.

If there is any stain, wipe it off with a soft, clean cloth. Clean dust and lint with a brush. (Photo 1)

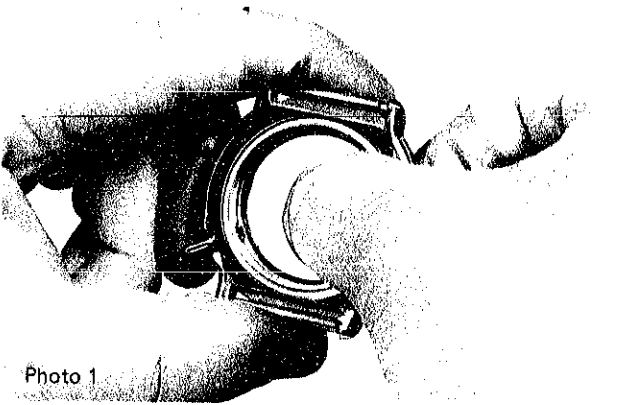


3-2 Remarks for Reassembling

Dry the parts completely before reassembling, and reassemble the watch in a room with low humidity.



④ Gasket for glass

- When replacing the gasket for glass, make sure that it will be placed in the position correctly. Check the place marked with ○ as shown in Fig. 2.
- Do not apply silicone grease (500,000 c.s.).

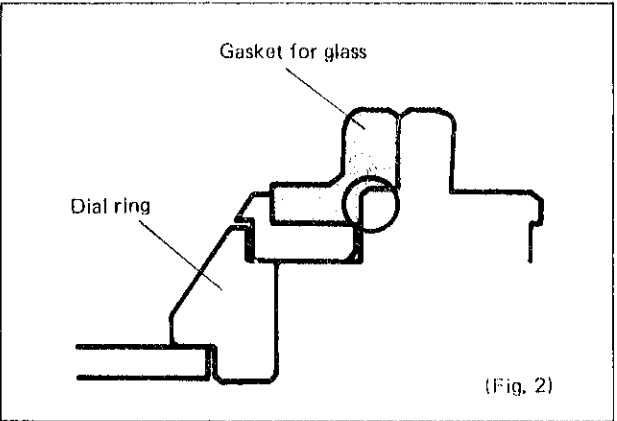

⑤ Glass

- Apply silicone grease slightly to the entire circumference indicated by the oblique lines in Fig. 3 with the tweezers bound with chamois sheet moistened with silicone grease (500,000 c.s.). (Wipe off excessive silicone grease (500,000 c.s.) with the chamois sheet. Otherwise, it will run into the dial ring to stain.)
- Place the glass stably by pushing it horizontally right from the above. While pushing the glass, be sure that the gasket for glass is placed in the position correctly. (Photo 2)

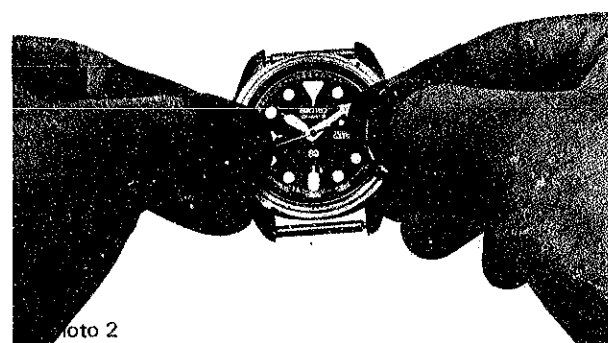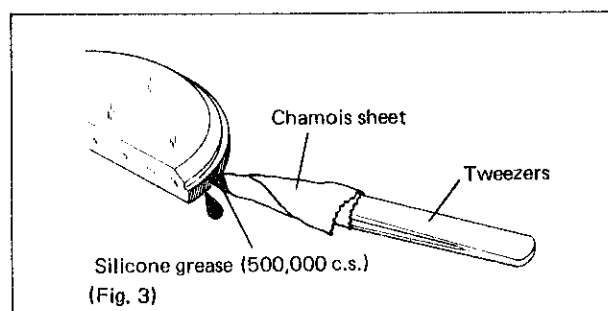


⑦ Gasket for rotating ring

Put fingers in the gasket and turn it to expand evenly, and place it inside the rotating ring firmly. (Photo 3)




⑨ Movement with dial

Fit the protrusion of the dial to the groove of the dial ring for reassembling. (Figs. 4, 5)

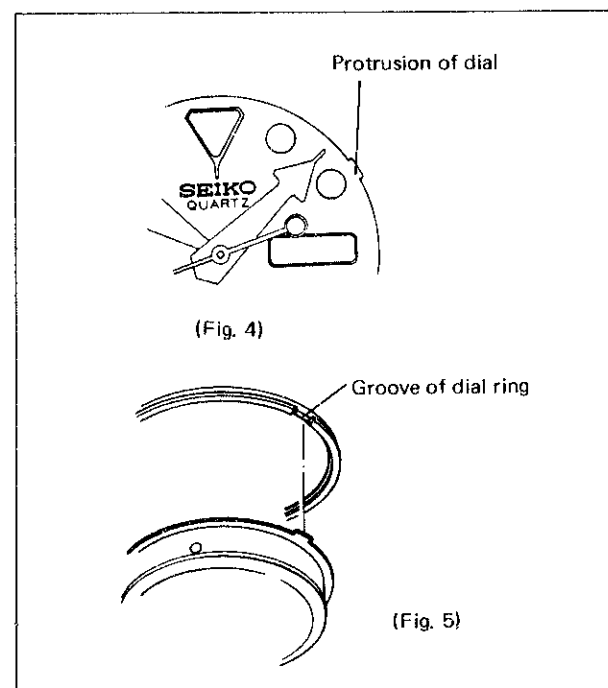


⑩ Stem with crown

After lubricating each portion indicated in the illustration, assemble the stem with crown slowly so that the crown gasket may not be damaged. (Figs. 6, 7)

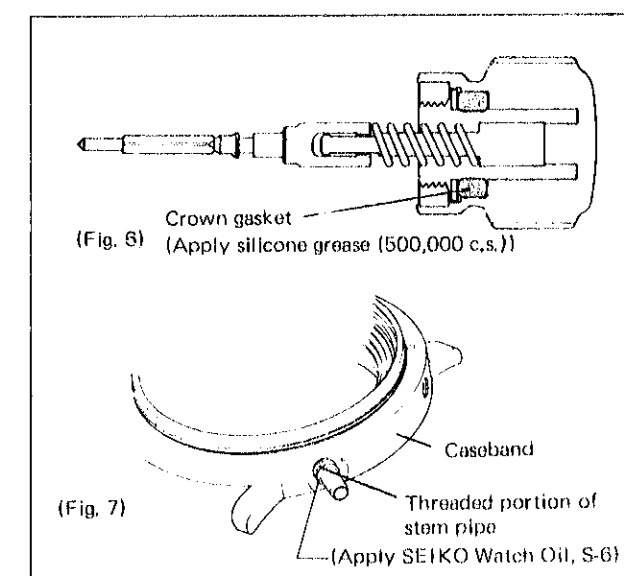

- Reassemble the disassembled joint stem as shown in Photo 4.

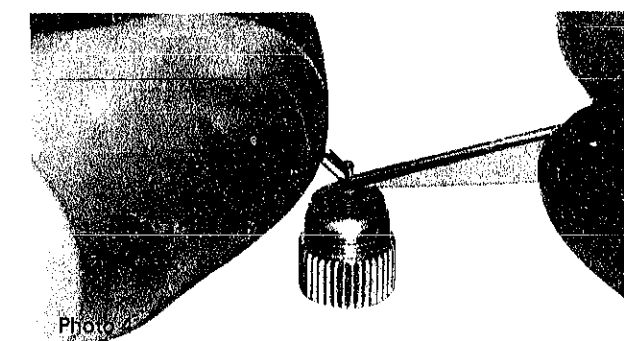

- After the reassembling is completed, check the rotation of the rotating ring. If the rotating ring does not rotate smoothly, apply silicone grease (500,000 c.s.) to the gasket for rotating ring or replace it with a new one and if it rotates too smoothly, replace the gasket for rotating ring with a new one.

IV. DISASSEMBLING, REASSEMBLING AND LUBRICATING OF THE MOVEMENT

1. How to disassemble, reassemble and lubricate the movement

• Disassembling and reassembling

Disassembling procedures; Figs. ① → ④⑧

Reassembling procedures; Figs. ④⑧ → ①

• Lubricating


The following marks shown in the illustrations for disassembling and reassembling indicate the types of oil, quantity of oil, and portions to be lubricated. Be sure to lubricate according to the marks.

Types of oil		Quantity of oil	
	Moebius A		Liberal quantity
	SEIKO Watch Oil, S-6		Normal quantity
			Extremely small quantity

Never lubricate the portions marked ⊗.


• After-sale servicing instruments and materials

Movement holder: The movement holder for Cal. 61 series of SEIKO movement holder set, S-680 is available.

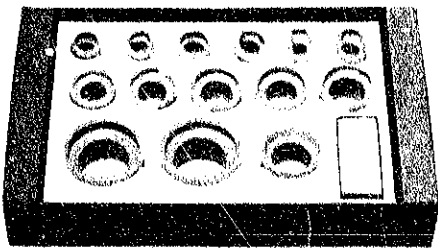


2. Disassembling and reassembling of the battery portion

The battery is fixed to the movement with the holding spring for battery. And the washer for holding spring screw of battery (1 piece) is assembled as shown in the right illustration. Reassemble the washer for holding spring screw of battery in the direction as shown in the illustration below.

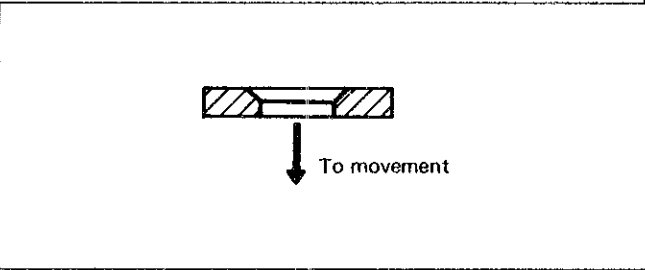


The two screws for holding spring for battery also serve as the circuit block screws.

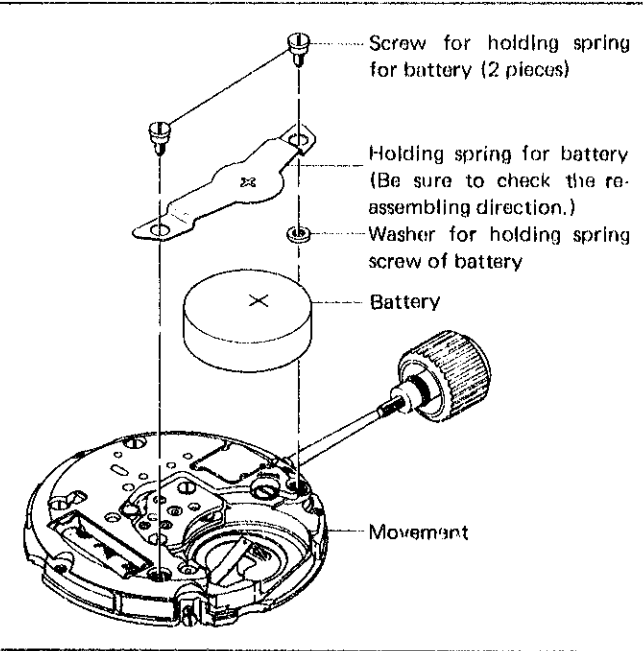

3. Disassembling, reassembling and lubricating of the calendar mechanism

The remarks for the parts numbered within the double circles are given in the next and following pages. Disassemble and reassemble according to the remarks.

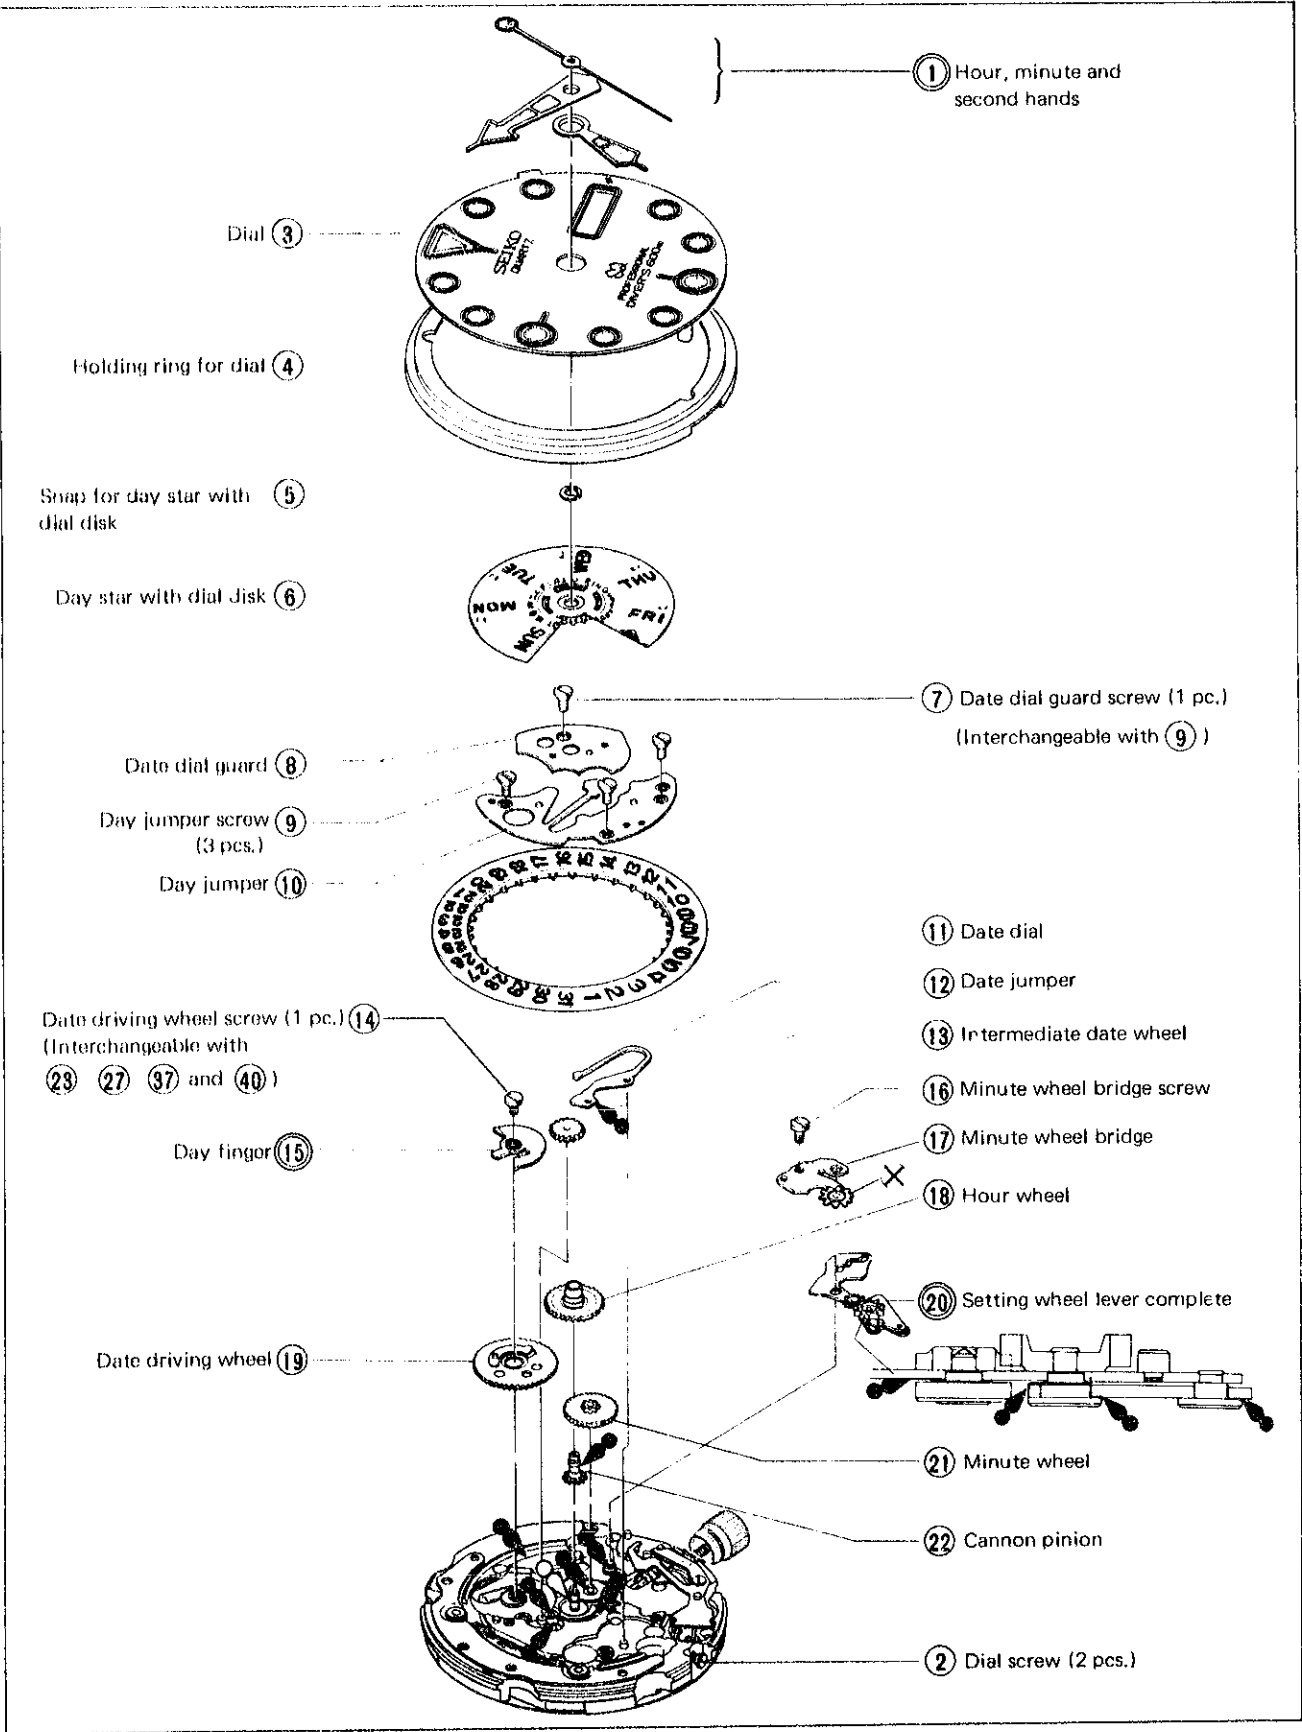


Remarks for disassembling and reassembling


- ① Hour, minute and second hands
 - Pull out the crown to the second click position for disassembling and reassembling.
 - Be sure to assemble the second hand exactly on the second mark (Either odd or even second marks will do.)

Remarks for reassembling


- ②⑩ Setting wheel lever complete
 - Reassemble so that the groove of the setting wheel lever complete holds the setting lever axle.

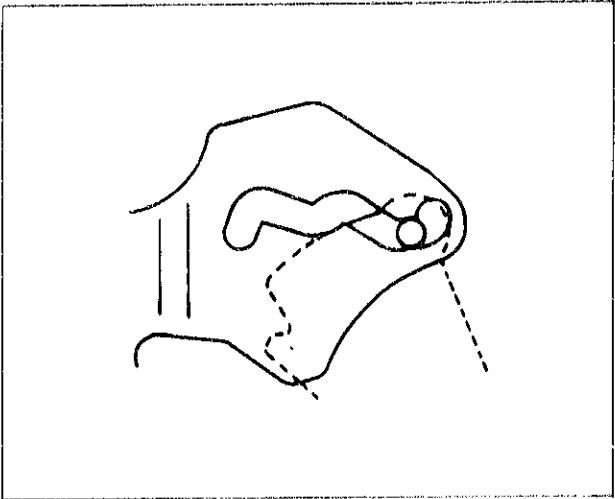

- ⑮ Day finger
 - Reassemble so that the pin of the date driving wheel is positioned as shown in the illustration on the right.

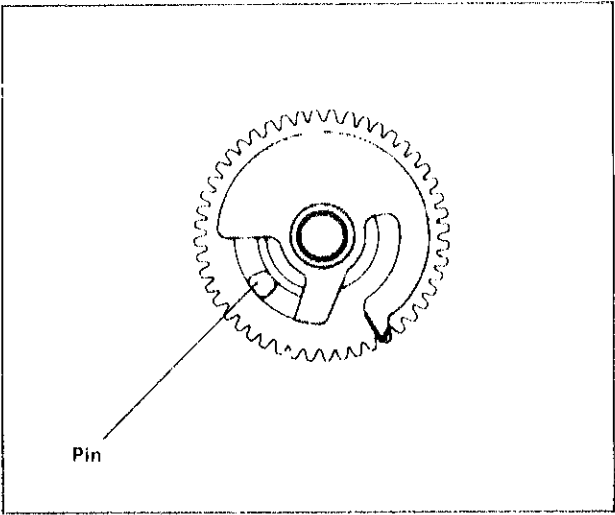

4. Disassembling, reassembling and lubricating of the circuit block, coil block and gear train

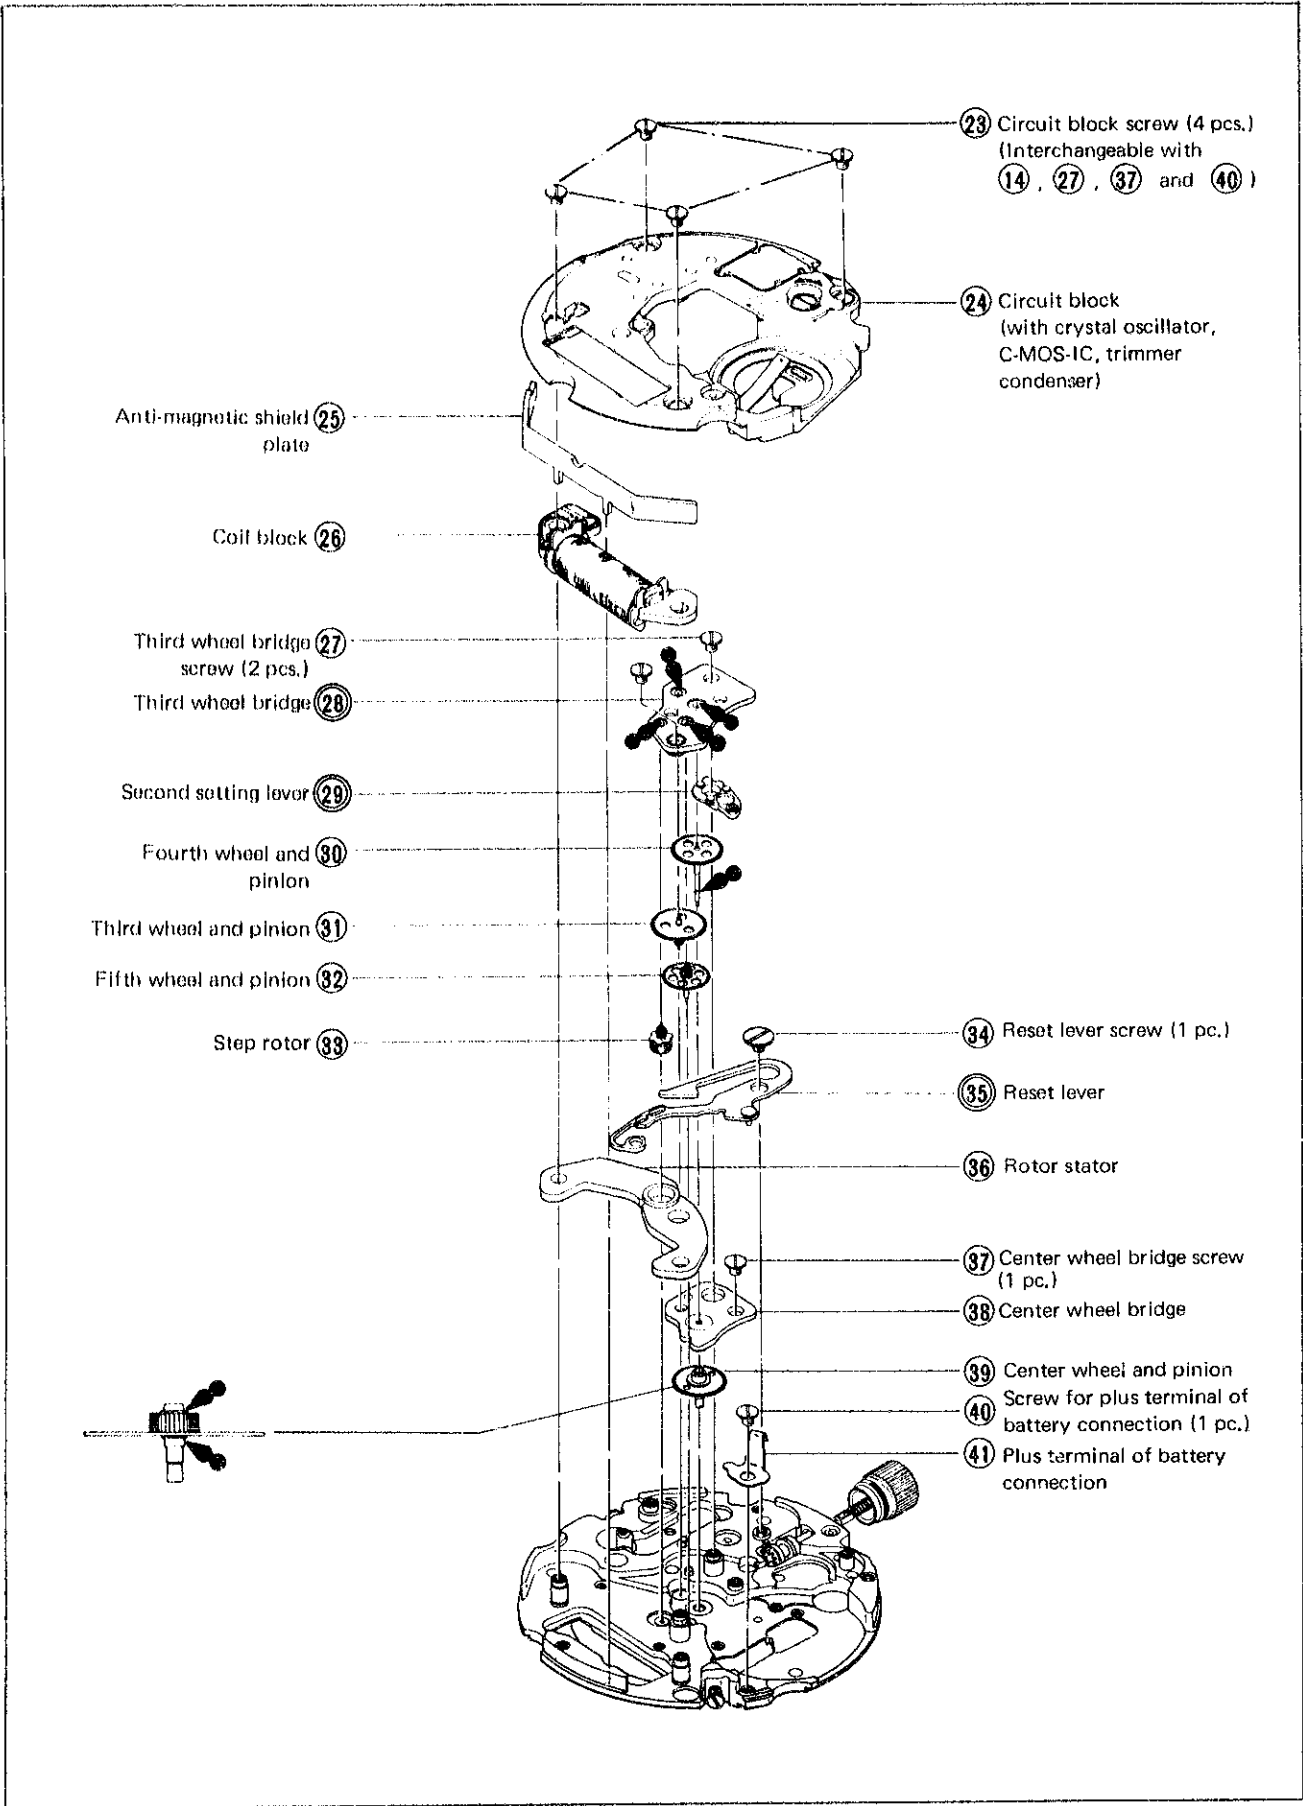

Remarks for disassembling


Disassemble with the crown in the normal position.

Remarks for reassembling


35 Reset lever

Reassemble with the crown in the second click position.

Depress the crown back into the normal position after the reset lever is set.

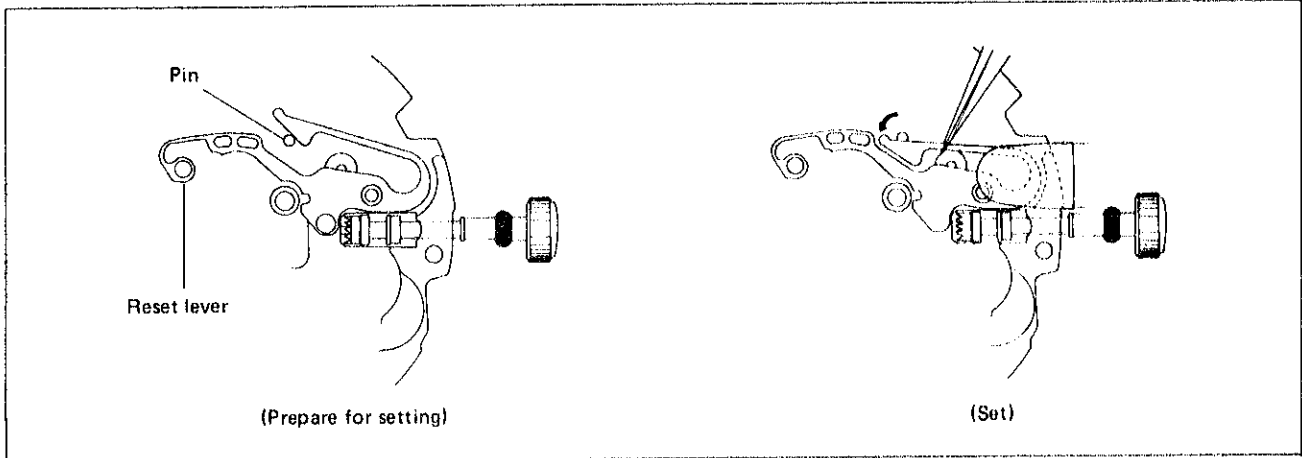


29 Second setting lever

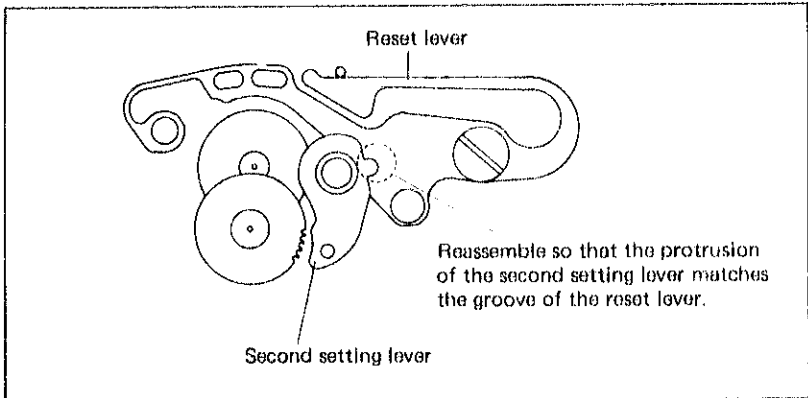


28 Third wheel bridge

After reassembling the third wheel bridge, check to see if the fourth wheel and pinion is set correctly when the crown is in the second click position.

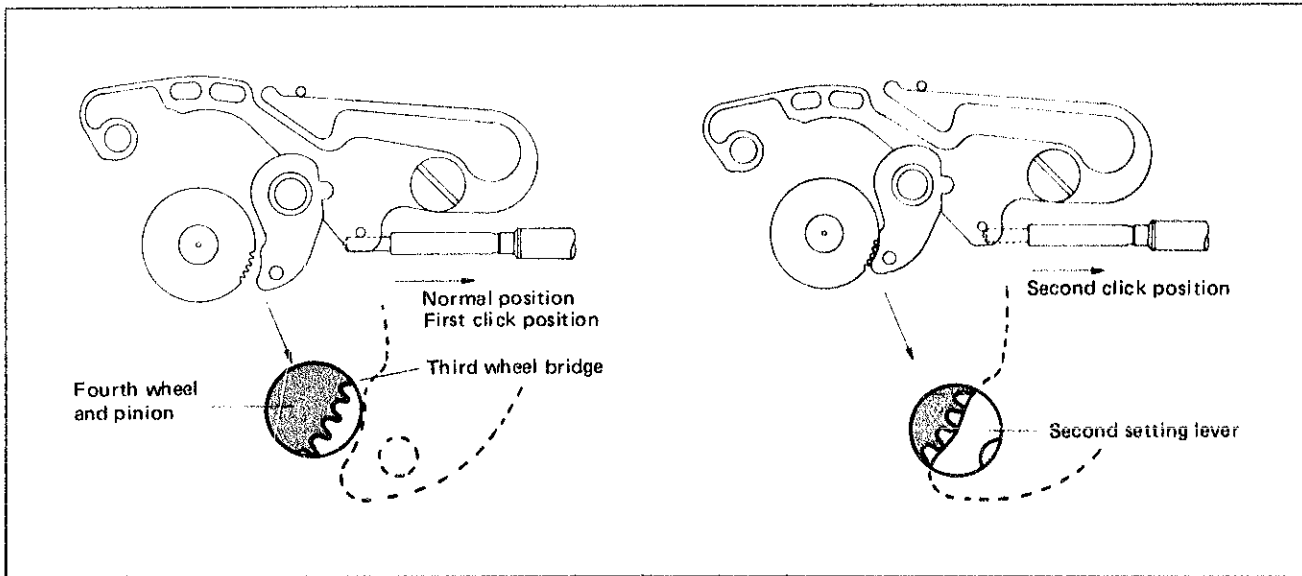

5. Disassembling, reassembling and lubricating of the setting mechanism

The parts in the setting mechanism are interchangeable with those of the Cal. 63 series.

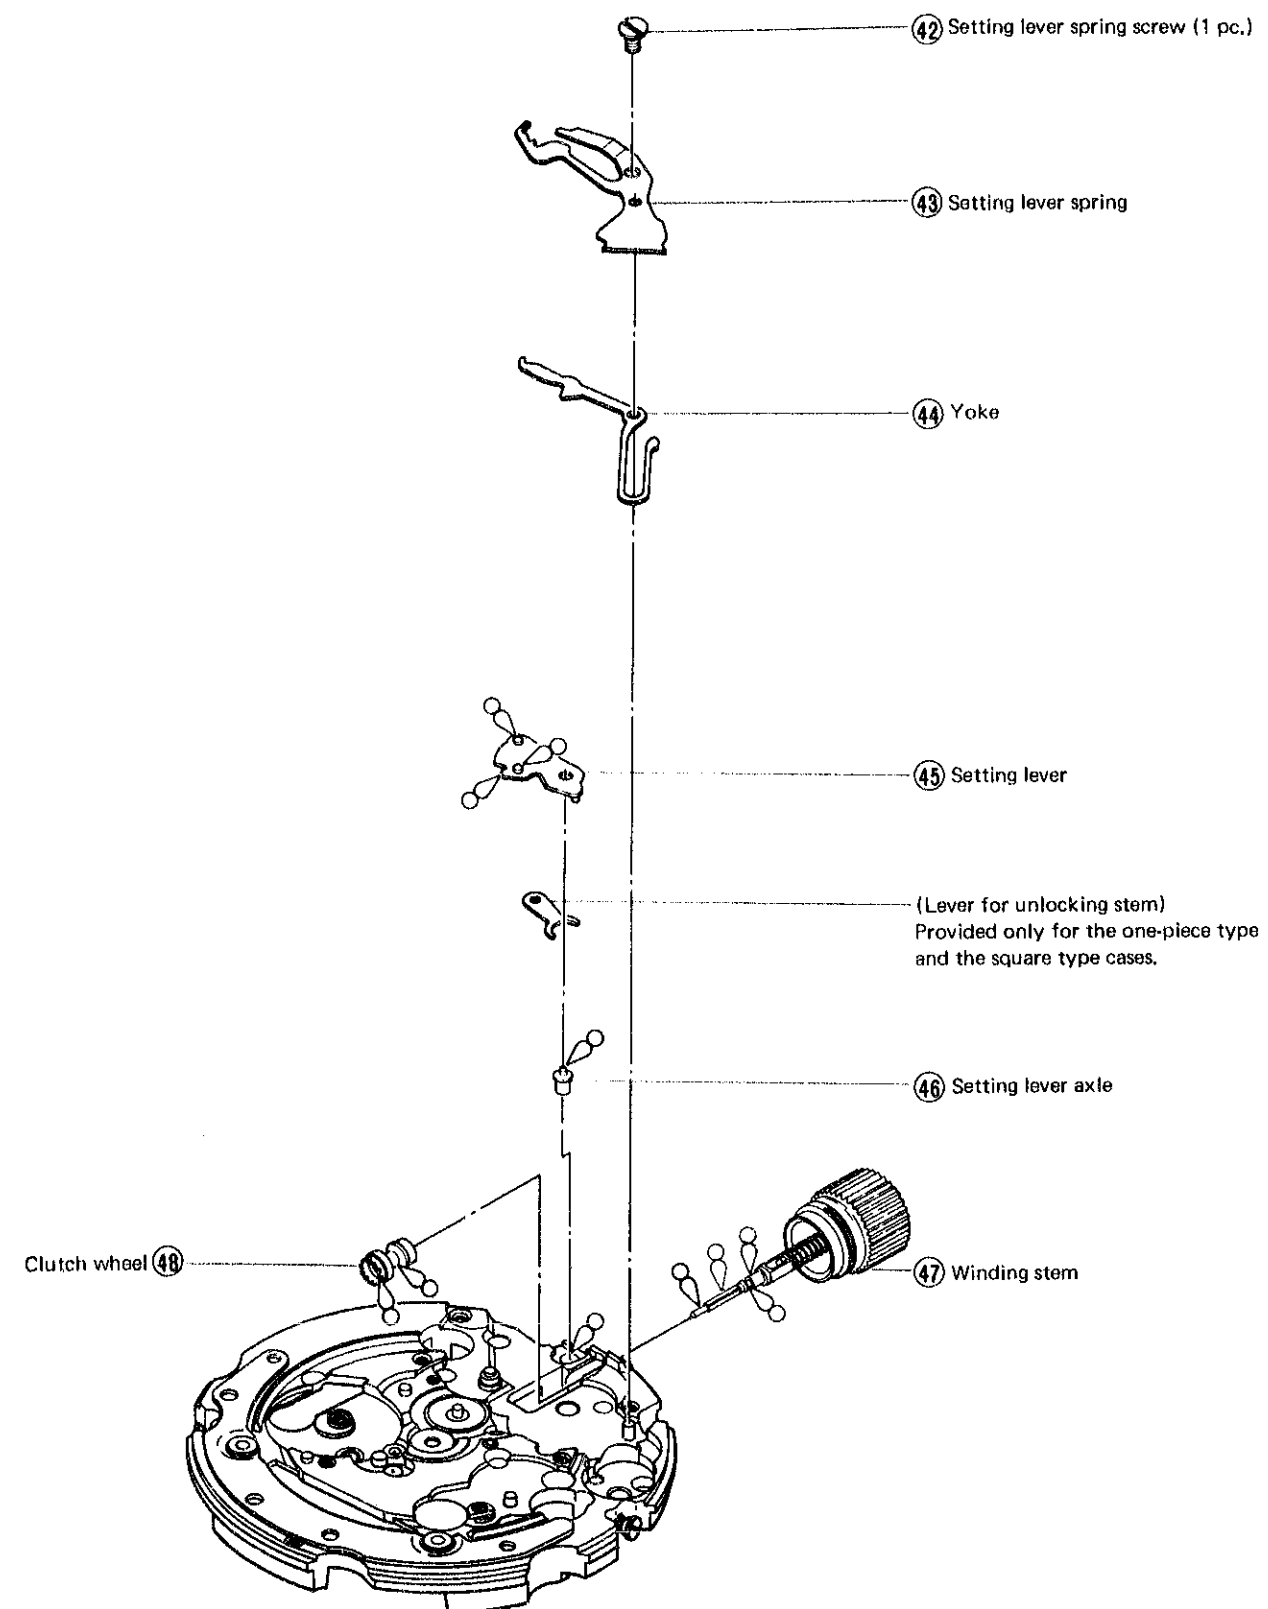


V. CHECKING AND ADJUSTMENT





1. Guide table for checking and adjustment









Repair the watch according to the following procedures at the ordinary repairs other than the periodic check.

When the second hand moves in 2 second intervals instead of the normal one second interval, check battery voltage and replace with provisional battery. The second hand moves in 2 second intervals when the battery life is coming to its end. The watch will, however, remain accurate while the second hand is moving in 2 second intervals.

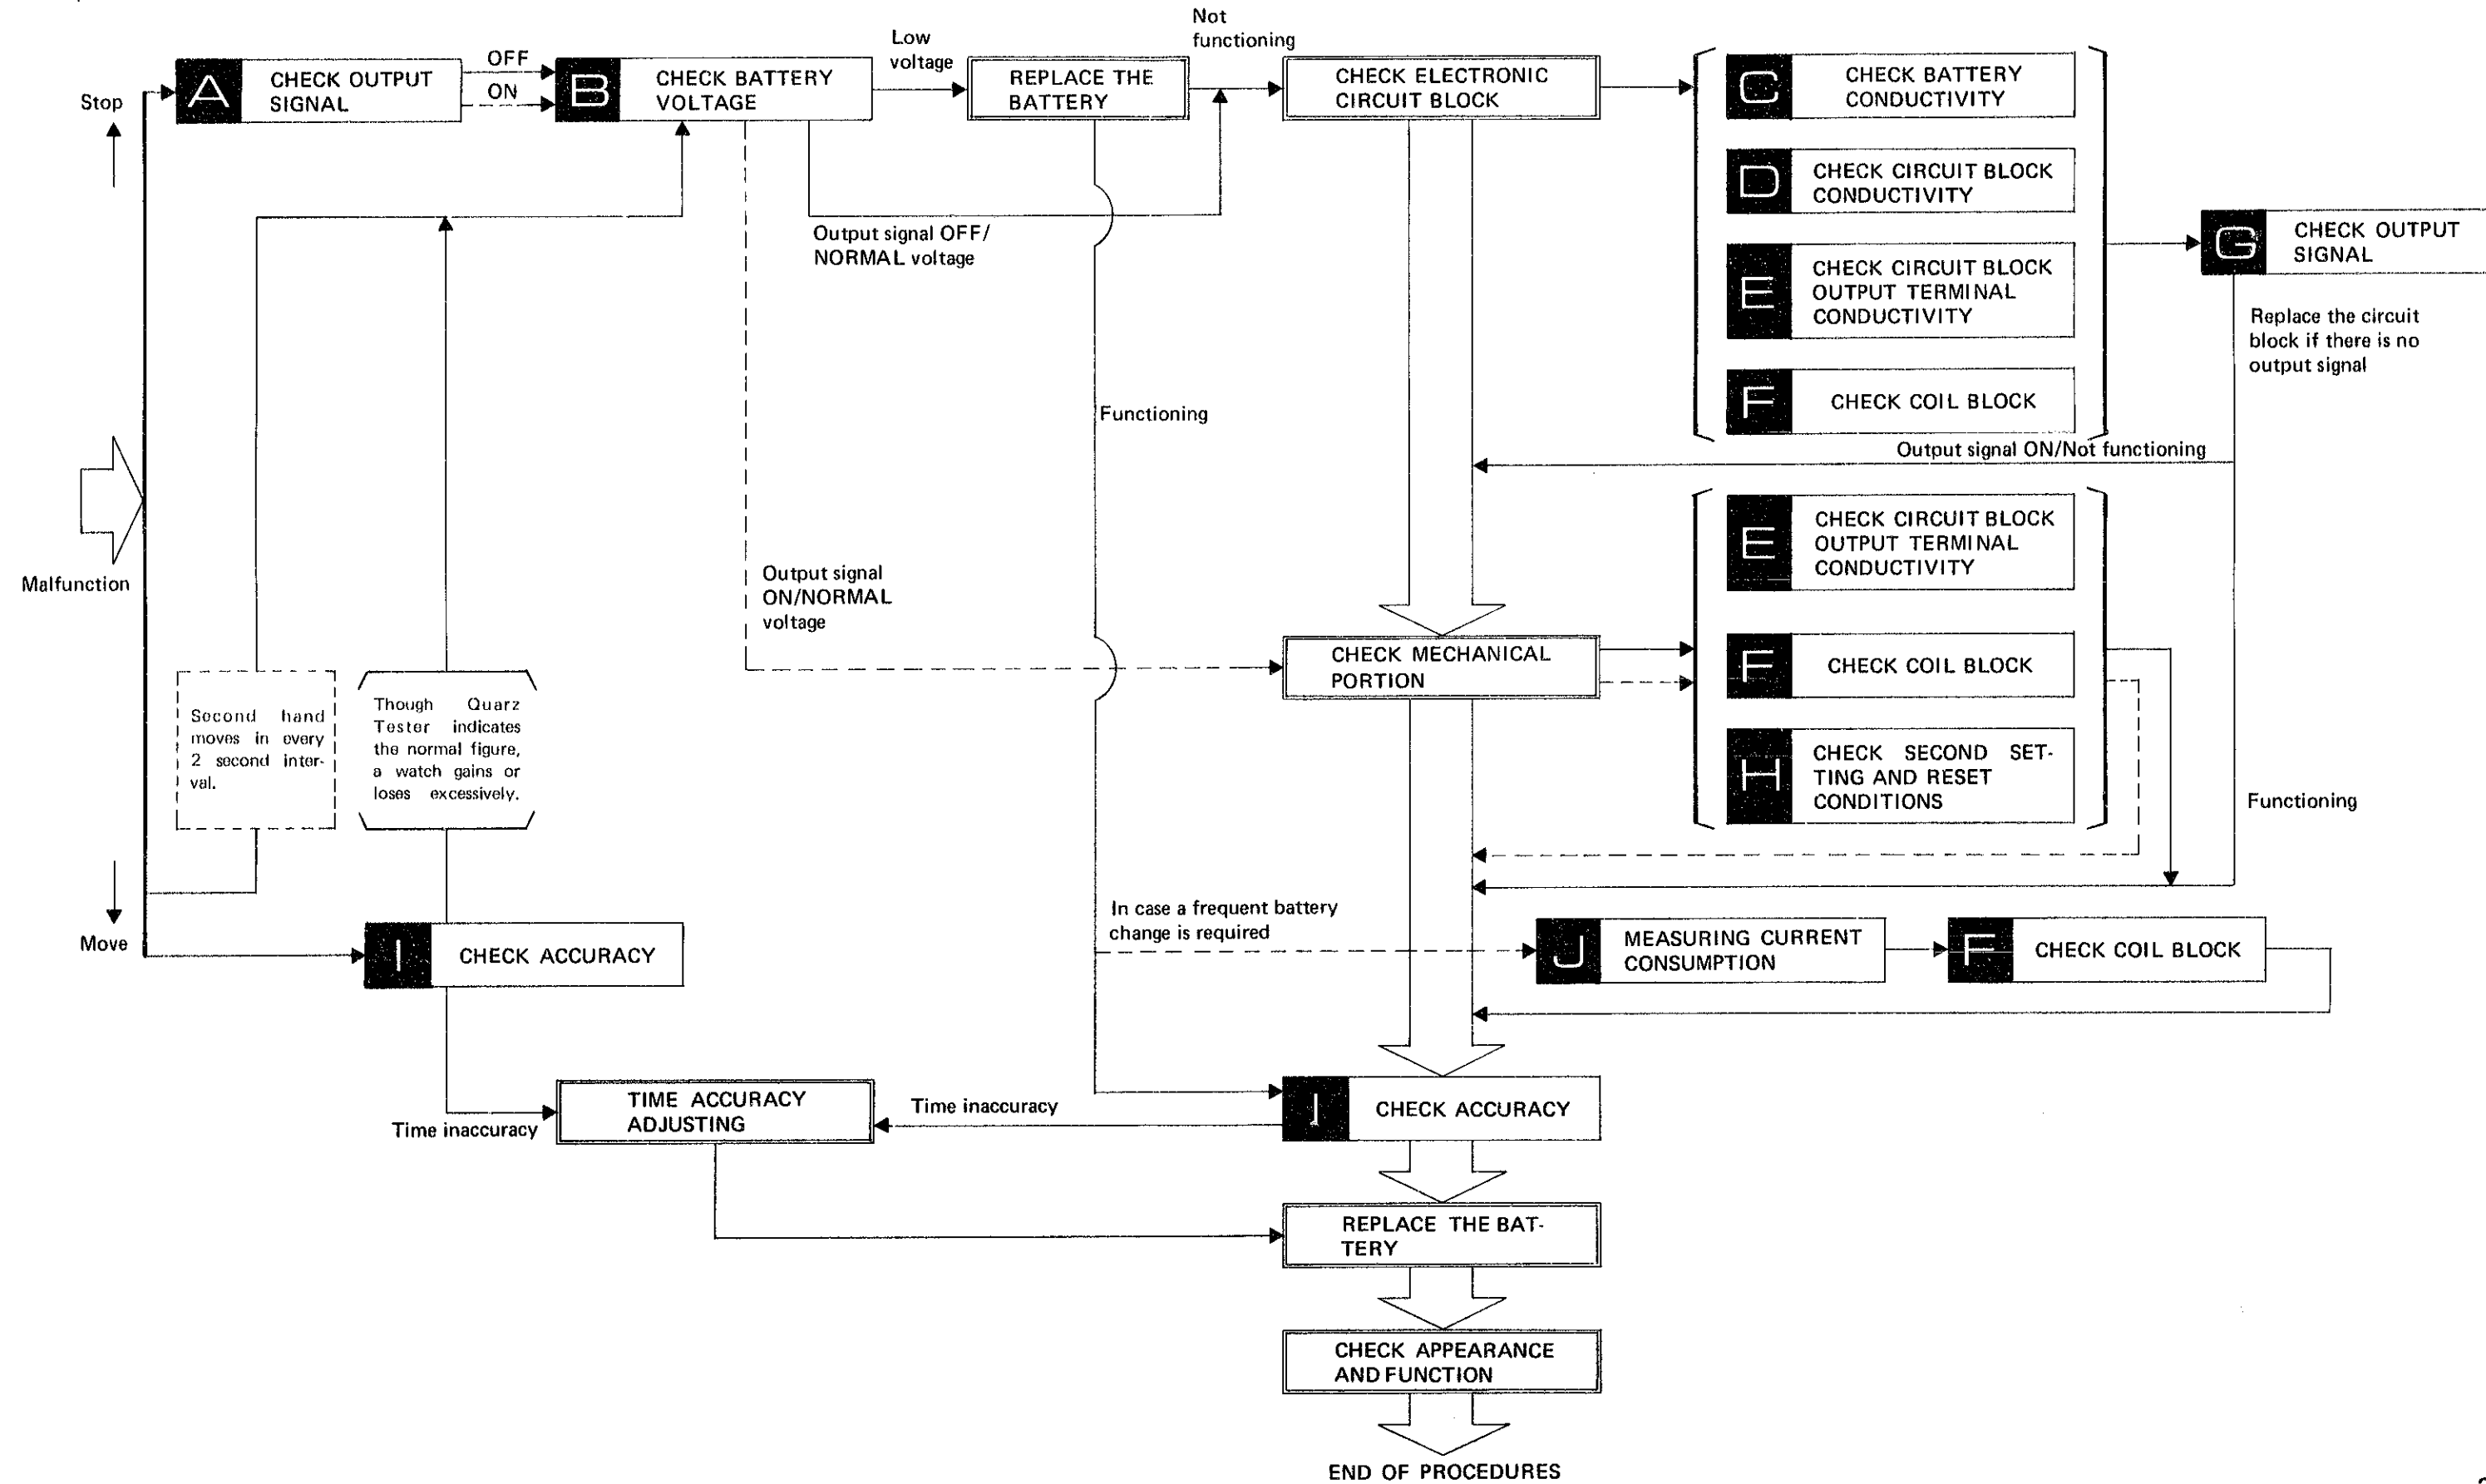

2. Procedures for checking and adjustment

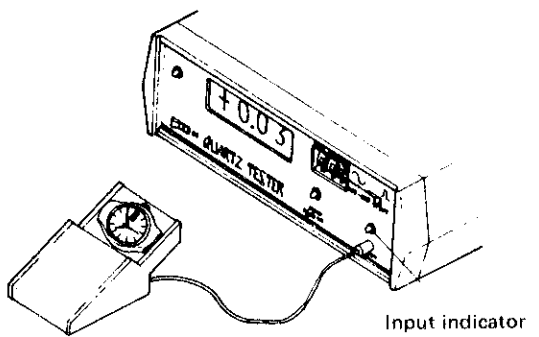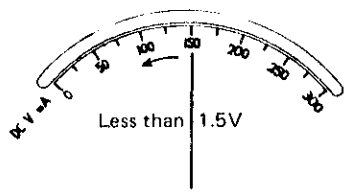	Procedures	Result	Adjustment and Repair
CHECK OUTPUT SIGNAL	Check output signal. 1. Set up the Quartz Tester 2. Checking Check for blinking input indication light.  Note: The checking must be made when the crown is in the normal position.	One-second blinking --- Normal No one-second blinking --- Defective	Proceed to B.
CHECK BATTERY VOLTAGE	Use the following procedures to check battery voltage. 1. Set up the Volt-ohm-meter Range to be used: 1.5V 2. Measuring - Probe Red (+) Battery surface (+) - Probe Black (-) Battery surface (-)  Note: When handling the battery, use non-metallic tweezers or fingercot. When there is battery electrolyte leakage, refer to "HOW TO CHECK AND REPAIR WHEN THERE IS BATTERY ELECTROLYTE LEAKAGE" below for repairing.	More than 1.5V --- Normal Less than 1.5V --- Defective 	Proceed to Check mechanical portion if one-second blinking is found. Proceed to Check electronic circuit block if one-second blinking is not found. Replace circuit block if the second hand moves in 2 second intervals. Proceed to Replace the battery. - If the watch functions after battery replacement, proceed to I. - If the watch does not function, proceed to Check electronic circuit block.
HOW TO CHECK AND REPAIR WHEN THERE IS BATTERY ELECTROLYTE LEAKAGE	1. Remove the movement from the case. 2. Disassemble the movement. 3. Wipe off battery electrolyte on the circuit block. (1) Wipe off battery electrolyte with a cloth moistened with distilled water. (If distilled water is not available, use tap water.) Note: Do not expose the trimmer condenser to water or alcohol. If it is exposed, there may be a change in its condenser capacity and eventually in the time accuracy.  Be sure to wipe off battery electrolyte on the battery connection.	(2) Wipe them with a cloth moistened with alcohol. (If the cleaned portions remain wet with water, they will corrode with rust.) (3) Dry with cool air by using a dryer. 4. Wipe off battery electrolyte on the other parts by following the procedures on page 16. 5. Reassemble the movement. (Replace the battery with a new one.) 6. Check to see if the time setting functions and the current consumption are normal.	

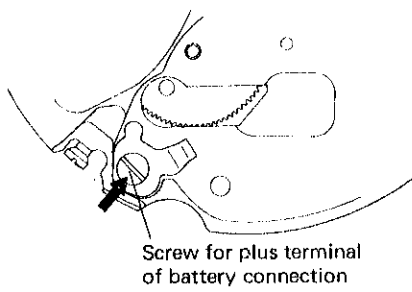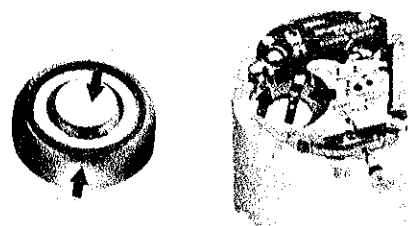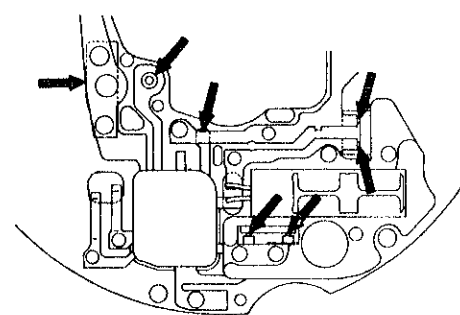	Procedures	Result	Adjustment and Repair
C CHECK BATTERY CONDUCTIVITY	Check to see if the battery current flow to the circuit is normal.  1. Check to see if the screw for plus terminal of battery connection is tightened firmly when the circuit block is dis-assembled. 2. Check for any foreign matter on the connecting portions of the battery, the plus terminal of battery connection and the battery connection. 	No loosened screw — — — — — Normal —————→ Loosened screw — — — — — Defective —————→ Uncontaminated — — — — — Normal —————→ Contaminated — — — — — Defective —————→	Proceed to C 2. Retighten the screw. Proceed to D. Wipe off any foreign matter. Note: Be careful not to bend the plus terminal of battery connection and the battery connection.
D CHECK CIRCUIT BLOCK CONDUCTIVITY	Check for any short circuit and defective conductivity of the conductive portions of the circuit block. Dis-assemble the circuit block and check conductivity of the arrow-marked portions by using a microscope. 	No short circuit or defective conductivity — — — Normal —————→ Short circuit and defective conductivity — — — Defective —————→	Proceed to E. Replace the circuit block with a new one.
E CHECK CIRCUIT BLOCK OUTPUT TERMINAL CONDUCTIVITY	1. Check the contacting portions of the circuit block output terminal and the coil block. 1 Check to see if there is no short circuit of the circuit block output terminal by viewing through the hole of the circuit block.   	Circuit block output terminal —————→  Short circuit —————→ 	Proceed to E 1 2 . Correct the bend of the circuit block output terminal by using tweezers. 

	Procedures	Result	Adjustment and Repair
CHECK CIRCUIT BLOCK OUTPUT TERMINAL CONDUCTIVITY	2 Disassemble the circuit block and check to see if the circuit block output terminal is positioned as shown in the illustration below. 2. Check for any contamination on the circuit block output terminal and the coil lead terminal.	Uncontaminated — — — — — Normal —————> Contaminated — — — — — Defective —————>	E 2. Correct the bend of the circuit block output terminal by using tweezers. Proceed to F. Wipe off any foreign matter.
CHECK COIL BLOCK	Check for broken coil wire and short circuit of the coil block after disassembling the circuit block. 1. Set up the Volt-ohm-meter Range to be used: OHMS R x 100 2. Checking Apply the probes of the Volt-ohm-meter to the coil lead terminal as shown in the illustration on the right.	Pointer of the Volt-ohm-meter swings —————> Broken coil wire (Pointer of the Volt-ohm-meter hardly swings) —————> Short circuit (Pointer of the Volt-ohm-meter swings excessively) —————>	Proceed to G if the electronic circuit block must be checked. Proceed to H if the mechanical portion must be checked. Replace the coil block with a new one.
CHECK OUTPUT SIGNAL	Check for output signal. 1. Set up the Quartz Tester 2. Checking Follow the same procedures as in A.	One-second blinking —————> Functioning —————> Not functioning —————> No one-second blinking —————>	Proceed to I. Proceed to H Check mechanical portion. Replace the circuit block with a new one.

CHECK SECOND SETTING LEVER AND RESET CONDITIONS

I

Procedures

Check the second setting lever condition and reset condition.

1. Check to see if the second setting lever functions correctly.
- 1 Check to see if there is clearance between the second setting lever and the fourth wheel and pinion when the crown is in the normal and the first click positions. Also, check to see if the second setting lever touches the fourth wheel and pinion when the crown is in the second click position. (Check through the hole of the third wheel bridge by using a microscope.)

2. Check the reset condition after the circuit block and the battery are reassembled.
 - (1) Check to see if the second hand stops immediately when the crown is pulled out completely and if it starts promptly one second after the crown is pushed in to the normal position.
 - (2) Check to see if the conductivity between the reset pin and the main plate is normal when the crown is pulled out completely.

- 1 Set up the Volt-ohm-meter
Range to be used: OHMS R x 1
Note: Be careful not to use the range other than R x 1. The circuit might be damaged if another range is used.

- 2 Checking
Measure the resistance by applying one of the probes of the Volt-ohm-meter to the third wheel bridge and the other probe to the reset pin.

Result

Functions-----Normal----->

Proceed to  2.

Does not function-----Defective----->

- Correct the bend of the spring of the reset lever if there is any. (If it is impossible to correct, replace the reset lever with a new one.)

- Replace the second setting lever with a new one if it is damaged.

Stops completely and starts moving after one second-----Normal----->

Proceed to .

Does not stop or moves irregularly-----Defective----->


Proceed to  2.

Less than 10Ω-----Normal----->


Replace the circuit block with a new one.

More than 10Ω-----Defective----->

- Correct the bend of the reset lever or replace it with a new one.

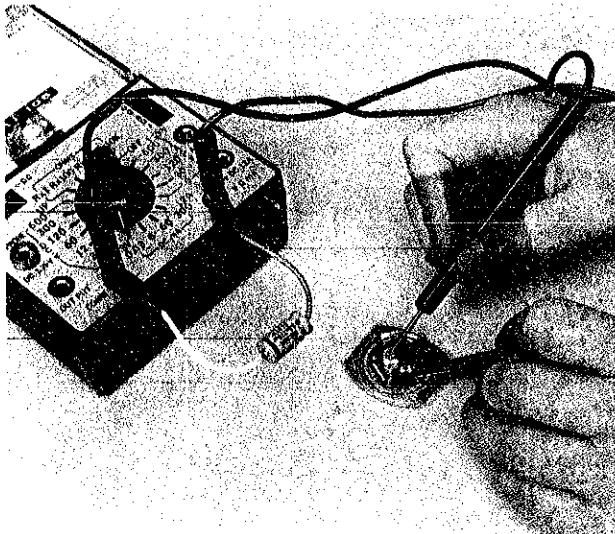	Procedures	Result	Adjustment and Repair
CHECK ACCURACY	Check gain and loss of time. 1 Set up the Quartz Tester 2 Checking Check using the same procedures as in 	Normal → Defective →	Follow the procedures shown on page 17. Proceed to Time accuracy adjusting
MEASURING CURRENT CONSUMPTION	In case a frequent battery change is required, a current consumption test is recommended. Use the following procedures. 1 Set up the Volt-ohm-meter • Range to be used: DC 0.03mA or 12μA • Set up the condenser of 200 ~ 500μF as shown in the photo. 2 Measurement • Place the battery on the third wheel bridge with its minus side up. - Probe Red (+) Battery connection - Probe Black (-) Battery surface (-)  Note: Be sure to measure with the crown of the watch in the pushed in position. • Be careful that the battery does not touch the reset pin when measuring.	Less than 2.5μA - - - - - Normal → More than 2.5μA - - - - - Defective → Remarks: There might be a slight difference in the measured value depending upon the type of volt-ohm-meter. When judging the circuit block condition, be sure to take this into consideration. All procedures of Disassembling, Reassembling, Checking and Adjustment are completed.	Proceed to  Proceed to  When the coil block is found normal, replace the circuit block with a new one.

VI. Periodic check procedures




" ● " mark showing the expected time for battery replacement

[Example]

The mark in the left illustration shows that the battery must be replaced during April to June, 1981.

Replace the battery of the watch only, which is received within the period marked with " ● " on the case back showing the expected time of battery replacement, with a new one and have it subjected to the periodic check in accordance with the procedures shown below.

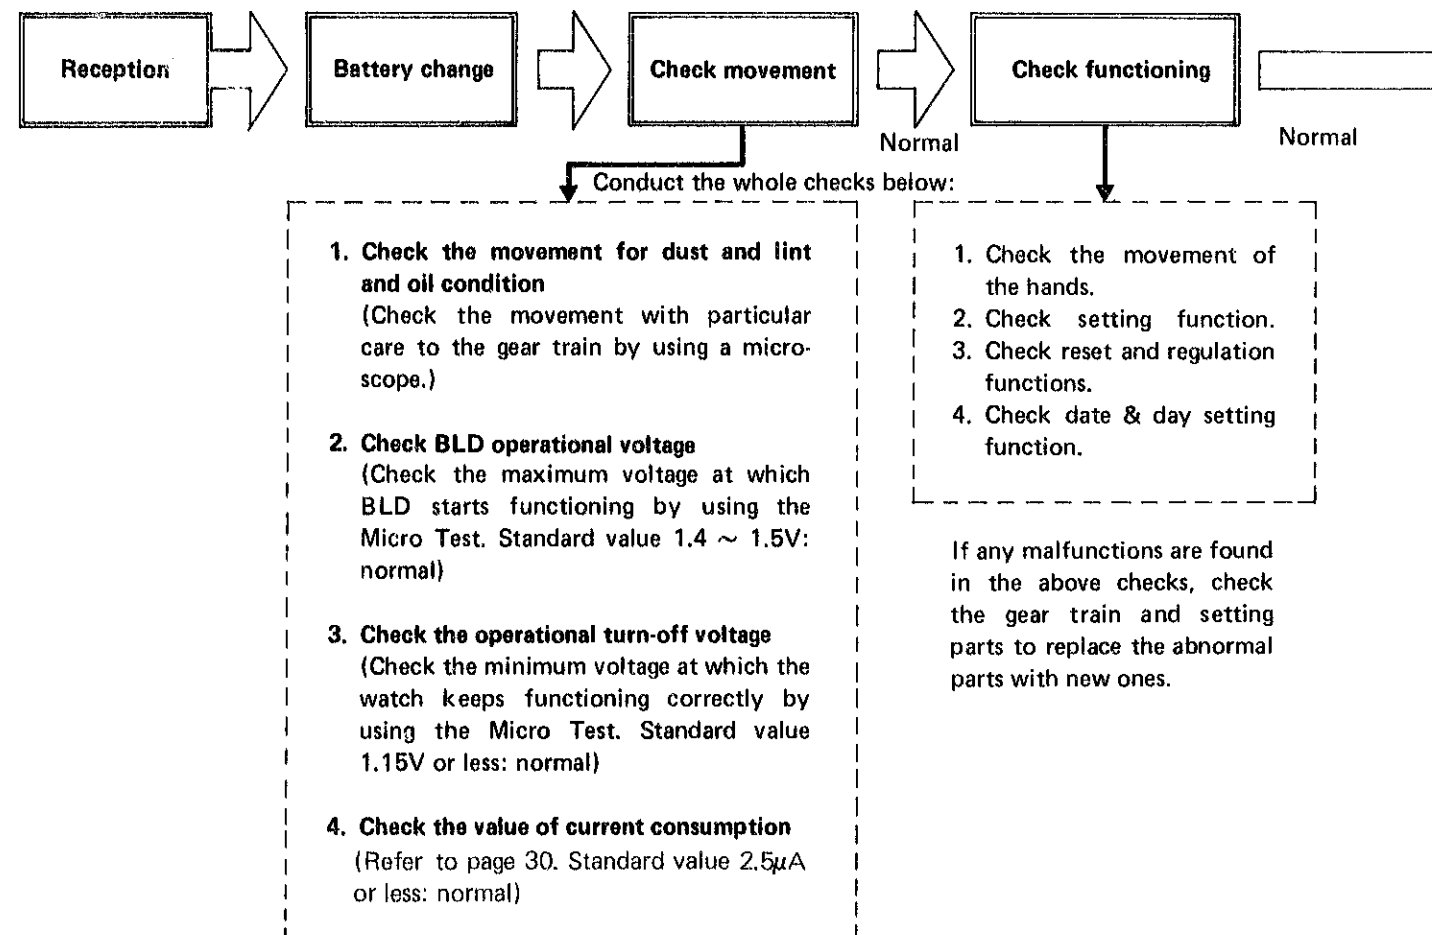

If any defects and malfunctions are found;


In case of 1 : Clean and lubricate the movement partially.

In case of 2 : Replace the current block with a new one


In case of 3,4: Clean and lubricate the gear train, and if further malfunctions are found, replace the circuit block with a new one.

Note: The following measuring instruments are necessary to perform the periodic check.

1. Microscope
2. Micro Test
3. Quartz Tester
4. Bergeon 5395 (testing capacity, 0-50 Atm.)

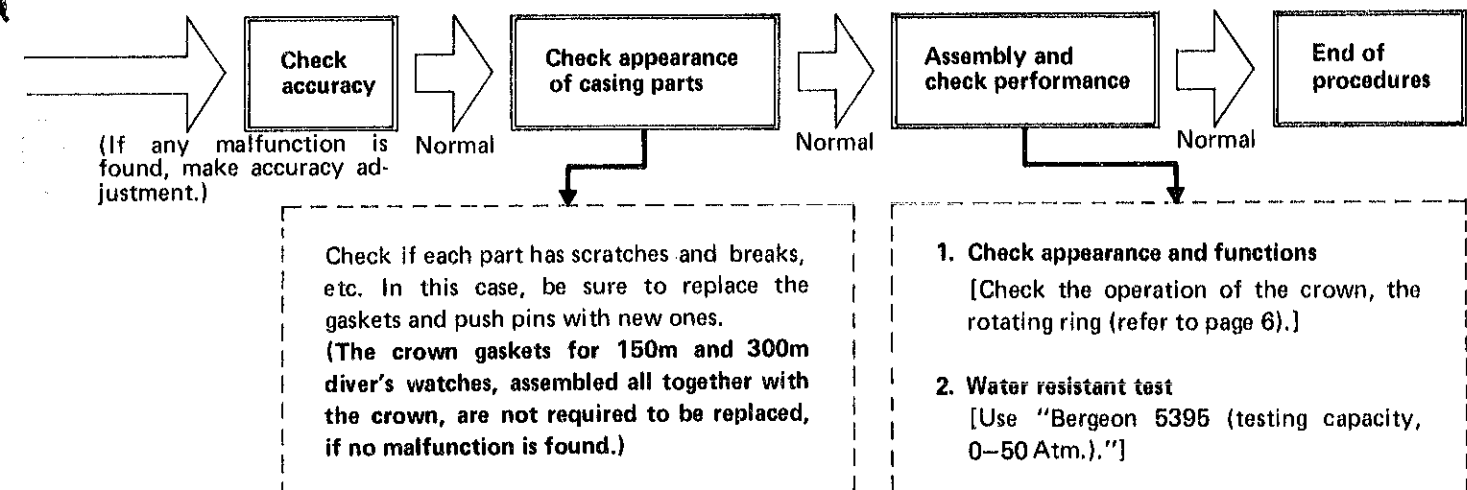

In the checks, be sure to inscribe " ● " mark on the case back showing the expected time of the next battery replacement. (Punch a mark or make a noticeable inscription.)



[Example]

Mark the position corresponding to April to June, 1984.