# TECHNICAL GUIDE AND PARTS LIST

**CAL. V253A** 

ANALOGUE QUARTZ

### **CONTENTS**

	CONTENTS	1
l.	SPECIFICATIONS	2
11.	LIST OF SCREWS USED	2
111.	DISASSEMBLING, REASSEMBLING AND LUBRICATING	3
IV	PARTSIIST	4

### FOREWORD ----

The Men's analogue watch with small second hand Cal. V253A is based on Ladies' analogue watch with small second hand Cal. V252A.

Only the difference between them is the position of the small second hand from the center of the dial scale (Cal. V252A: 4.2mm, Cal. V253A: 6.61mm).

This guide only gives the procedures which is exclusive for Cal. V253A. For common parts, refer to the Technical Guide and Parts List for Cal. V252A.


### I. SPECIFICATIONS

Cal. No.		V253A			
Indication sys	tem	Three hands (Hour, minute and small second hand)			
Driving system	n	Step motor (load-compensative driving pulse system)			
Additional me	chanism	Electronic reset switch Second setting device			
L <del>oss/gain</del>		Monthly rate: less than 20 seconds at normal temperature range			
The second section of the second section of	Size of main plate	18.4 mm (6H – 12H), 15.3 mm (3H – 9H)			
Movement size	Casing diameter	ø18.1 mm			
312.0	Height	2.9 mm			
Regulation system					
Quartz Tester measuring gate		10-second gate			
Battery	Battery	SEIKO (SEIZAIKEN) TR621SW, Maxell SR621SW, SONY EVEREADY 364 U.C.C. 364			
Dattery	Voltage	1.55V			
	Battery life	Approx: 2 years for SEIKO (SEIZAIKEN) TR621SW, Approx: 1.5 years for MAXELL SR621SW, SONY EVEREADY 364 U.C.C. 364			
Jewels		0 jewel			

# II. LIST OF SCREWS USED

Shape	Part No.	Name	Shape	Part No.	Name
e man e e e e e e e e e e e e e e e e e e e	012 057	Circuit block screw (1 pce.)	Section 2 year makes Section 2 year makes Section 2 years	*012 060	Battery clamp screw
*** ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '			April 1 - April		(1 pce.)
Active of the second of the se	012 058	Train wheel bridge screw (2 pcs.)	A Long	012 708	Screw for battery connection (+) (2 pcs.)
			* The ba	ttery clamp scr	ew is not used in some models.
f	012315	Screw for additional train wheel bridge (2 pcs.)	· ·		
	<u></u>				

# III. DISASSEMBLING, REASSEMBLING AND LUBRICATING

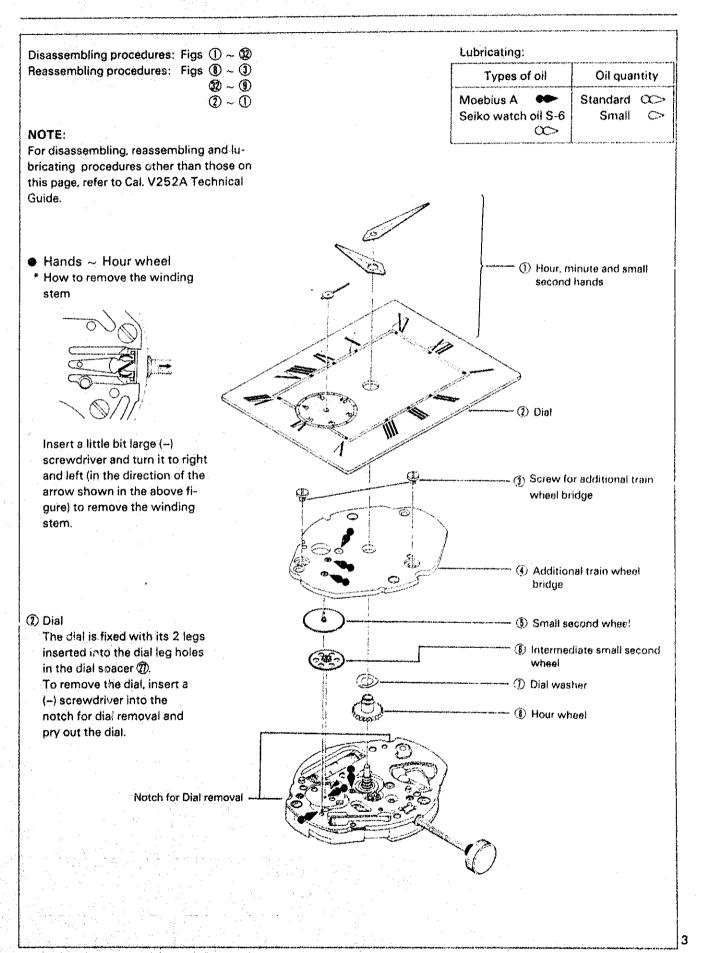

# IV. PARTS LIST

Cal. V253 A					
PARTS NO.	PARTS NAME				
125 023	Train wheel bridge				
126 005	Additional train wheel bridge				
231 033	Third wheel & pinion				
238 233	Guide pipe for winding stem				
240 007	Small second wheel				
241 063	Fourth wheel & pinion				
261 237	Minute wheel				
*270 064	Center minute wheel				
*270 065	Center minute wheel				
*271 073	Hour wheel				
•271 074	Hour wheel				
281 237	Setting wheel				
317 005	Intermediate small second wheel				
*351 131	Winding stem (\$80)				
*351 132	Winding stem (ø90)				
391 233	Train wheel setting lever				
491 141	Dial washer				
701 010	Fifth wheel & pinion				
4000 086	Circuit block				
4002 239	Coil block				
4146 013	Step rotor				
4225 237	Battery clamp				
4239 028	Rotor stator				
4270 237	Battery connection (-)				
4271 243	Battery connection (+)				
4408 240	Dial spacer				
4455 237	Reset lever				
012 057	Circuit block screw				
012 058	Train wheel bridge screw				
012 060	Battery clamp screw				
012 315	Screw for additional train wheel bridge				
012 708	Screw for battery connection (+)				
017 591	Reset pin				
• SEIKO (SEIZAIKEN)	Battery				
TR621SW					
MAXELL SR621SW					
SONY EVEREADY					
364					
● U.C.C. 364					

### Remarks:

\* Center minute wheel, Hour wheel

There are two different types as specified below. Combination:

*Type	Center minute wheel	Hour wheel	
М	270 064	271 073	
L	270 065	271 074	

\*Abbreviation M ..... Standard type (Movement type) L...... Long type

The type of winding stem is determined based on the design of case. Please refer to "Casing Parts Catalogue."

<sup>\*</sup> Winding stem